

# FY17 QUILLAYUTE RIVER O&M DREDGING

**John Pell**

Project Manager

Seattle District

26 April 2018

*“The views, opinions and findings contained in this report are those of the authors(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other official documentation.”*



US Army Corps  
of Engineers®



# FY17 QUILLAYUTE RIVER O&M DREDGING

Location: Inner channel and access lanes of boat basin

Method: Cutterhead pipeline

Quantity: 53,495 K CY

Placement Site: Site B

When: 25 Sep thru Nov 2017

Environmental Compliance  
Complete for 7 years

Suitability Determination  
completed April 2018.

- Recency for navigation channel and non-slip boat basin area - September 2024
- Recency for boat slips - September 2022



US Army Corps  
of Engineers®



# QUILLAYUTE SPIT REVETMENT REPAIR

Location: Quillayute (aka Rialto) Spit

Method: Rock Replacement

Quantity: estimate:

- 6 ton armor rock
- 3 ton core rock
- 3 ton quarry spall


Placement Site:

- Sta. 24+00 to 25+00 and
- Sta. 19+00 to 20+00

When: Potentially fall of 2018

Environmental Doc Status:

- New environmental documentation will be required (EA/FONSI/SOF)
- Agency coordination required

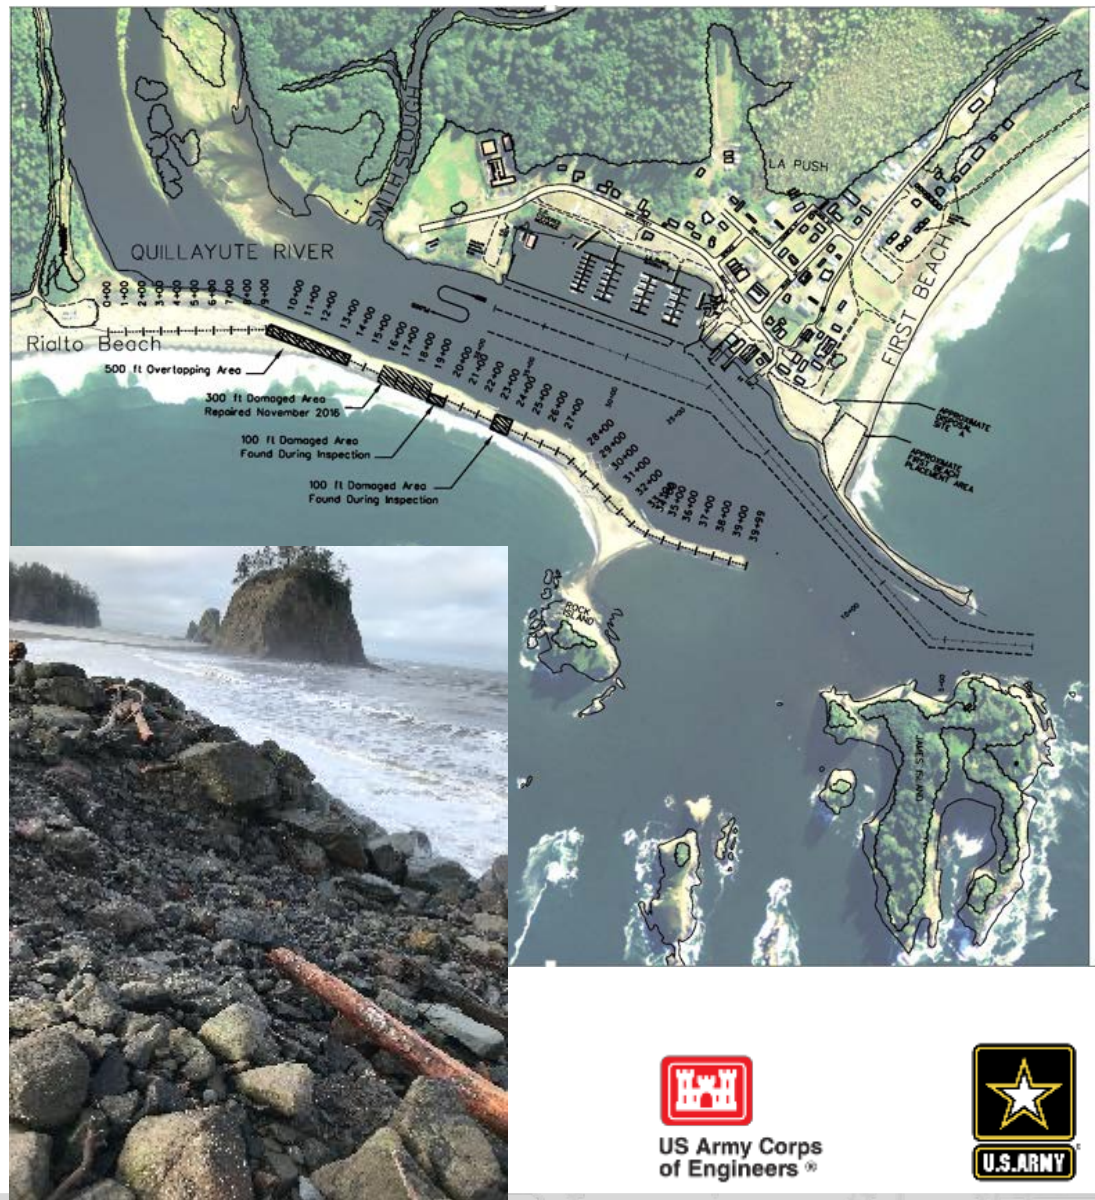



Questions  
Comments



US Army Corps  
of Engineers<sup>®</sup>



U.S. ARMY<sup>®</sup>