



US Army Corps
of Engineers
Seattle District

Department of the Army Regional General Permit – 4



Maintenance, Modification, Construction, and Retention of Overwater Structures in Southern Lake Chelan, in the State of Washington

Effective Date: May 13, 2011

Expiration Date: May 13, 2016

Permit Number: CENWS-OD-RG-RGP-4

Authority: In accordance with 33 CFR 325.2(e)(2), the U.S. Army Corps of Engineers (Corps) has modified and issued Regional General Permit 4 (RGP-4) that authorizes certain activities in or affecting navigable waters of the United States, upon the recommendation of the Chief of Engineers, pursuant to Section 10 of the Rivers and Harbors Act of 1899 (33 U.S.C. 403) and Section 404 of the Clean Water Act (33 U.S.C. 1344).

Issuing Office: U.S. Army Corps of Engineers, Seattle District
Regulatory Branch, CENWS-OD-RG
Post Office Box 3755
Seattle, Washington 98124-3755
(206) 764-3495

Purpose and Location: The purpose of RGP-4 is to authorize the maintenance, modification, construction, and retention of overwater structures in Southern Lake Chelan, in the State of Washington for the purpose of water access and recreation.

Use of RGP-4: To use RGP-4, a prospective permittee must first notify the Corps of the proposed work in accordance with the application procedures in this RGP. ***The proposed project is not authorized under this RGP, and work may not commence, until the District Engineer or their designee has issued written notification that the proposed project appears to meet the requirements of RGP-4 and is authorized.***

The permittee is responsible for ensuring that the authorized structures and/or activities comply with all applicable provisions of this RGP, including any project-specific special conditions that may be added by the District Engineer. Failure to abide by the requirements of this RGP may constitute a violation of the Clean Water Act and/or Rivers and Harbors Act. For purposes of this RGP, the term “permittee” shall include all successors in interest.

This RGP contains provisions intended to protect the environment and cultural resources. Work that will not comply with these provisions is not authorized by this RGP and may require Department of the Army authorization by a standard individual permit. Moreover, compliance with the provisions of this RGP does not itself guarantee that the work is authorized by this RGP. Activities that appear to comply with the provisions of this RGP but would have an unacceptable adverse impact on the public interest are not authorized.

Activities authorized by RGP-4: Work authorized by RGP-4 is limited to the activities described below and located in Southern Lake Chelan. For the purposes of this RGP, “Southern Lake Chelan” is defined

as the portion of Lake Chelan downlake (south) of a line drawn between Limekiln Point (-120.2716; 48.0139) and Box Canyon Creek (-120.3324; 48.0145) (see Appendix D for a map of this limit). All structures and activities authorized must be for noncommercial use. Authorized activities include maintenance, modification, construction, and retention of residential overwater structures for the purpose of water access and recreation. Overwater structures for this RGP are defined as piers, ramps, floats, watercraft lifts, and their associated structures. Associated structures include concrete footings, piling, ladders, handrails, steps, davits (suspended watercraft lifts), swim steps, watercraft grids or lifts, and lighting. RGP-4 only authorizes the installation, construction, or retention of one pier/ramp/float structure per property. The section of the RGP labeled *Project Impact Reduction and Conservation Measures* provides additional details about limitations.

Application Procedure: Authorization under this RGP requires that prospective permittees notify the Corps of the proposed work in accordance with the application procedures described in this section. Applicants shall not proceed with the proposed work until the District Engineer or their designee issues written notification that the proposed project appears to meet the requirements of this RGP and is authorized. To notify the Corps of a proposed project that may qualify for authorization under this RGP, the prospective permittee must submit the following information:

1. **Application:** The Corps requires that the applicant submit a completed Joint Aquatic Resources Permit Application (JARPA) and Appendix A of this RGP. Submittal of a complete application constitutes the applicant's voluntary agreement to meet all of the requirements of this RGP.
2. **Drawings:** A complete application also includes a vicinity map and plan, profile, and cross-section drawings of the proposed structures. Overwater structures on adjacent properties should be shown. The drawings must include a title block. For assistance with preparation of the drawings, please refer to Appendix C, *Drawing Checklist*.
3. **Cultural/Archeological Resources Information:** For activities that may affect historic properties listed or eligible for listing in the National Register of Historic Places, a complete application must include a description of each historic property that may be affected by the proposed work and a map indicating the location of the property. We will notify the applicant if an archeological survey is necessary.
4. A signed Joint-Use Agreement if the overwater structure will be jointly used by multiple landowners.

Also, please submit any other relevant information which will help with our permit review, such as:

- Hydraulic Project Approval (HPA) obtained from the Washington Department of Fish and Wildlife.
- Photographs of the project area and shoreline.
- Copies of other environmental compliance documents or permits.

PROJECT IMPACT REDUCTION AND CONSERVATION MEASURES

Activities authorized by RGP-4 must comply with all applicable Project Impact Reduction and Conservation Measures (CMs) listed below.

Maintenance:

1. Any maintenance performed on an authorized structure shall not change the size or configuration from that which was originally authorized unless the changes are environmentally beneficial or reduce the size of the structure.

Piers, Ramps, and Floats:

2. This permit authorizes only one pier/ramp/float structure per property. This property must front Lake Chelan. Submerged structural components of piers, ramps, and floats, including concrete footings, framing, and cross bracing shall be minimized to that which is required for structural stability.
3. This permit authorizes a joint-use pier/ramp/float structure constructed by more than one private property owner fronting the shoreline. All joint-use properties shall front the waterway. All affected joint-use property owners must sign a legal agreement to construct a joint-use pier/ramp/float structure. At a minimum, the agreement shall include a statement from each property owner that they voluntarily agree to build no additional overwater structures on their property except for the maintenance or modification of the joint-use overwater structure which is the subject of the permit application. A copy of this agreement must be submitted with the application.
4. Piers, ramps, and/or floats shall not extend more than 55 feet waterward (toward the middle of the lake) of the ordinary high water mark. A greater length may be authorized up to the minimum length necessary to reach water of sufficient depth for safe boat moorage at the waterward end of the structure.
5. A float system must be held in place by piling or other fixed structures, and may consist of more than one individual float. Float stoppers must be installed so that the float does not rest on the substrate at any time.
6. The width of any individual section of deck shall not exceed 6 feet for piers and floats and 4 feet for ramps.
7. Total deck area of single-use piers, floats, ramps, and other overwater structures waterward of the ordinary high water mark shall not exceed 320 square feet. If it is necessary to have a single-use structure greater than 55 feet in length because of water depth limitations referenced in CM 4, the total area of the structures shall not exceed 450 square feet.
8. Total deck area of joint-use piers, floats, ramps, and other overwater structures waterward of the ordinary high water mark shall not exceed 450 square feet.
9. Only open pile pier construction is authorized.

10. Flotation for the float shall be fully enclosed and contained in a shell (e.g., polystyrene tubs, not shrink wrapped or sprayed coatings) that prevents breakup or loss of the flotation material into the water and is not readily subject to damage by ultraviolet radiation or abrasion caused by rubbing against piling or waterborne debris.
11. No other structures or shading objects such as, but not limited to, storage boxes, benches, planters, sheds, tables, outdoor furniture, living quarters, fueling facilities, carpeting, or covered boat moorage shall be constructed or installed on any overwater structure authorized under this RGP.

Piling and Associated Fill:

12. Fill around piling may only be used when the condition of the substrate prevents the use of driven piles. The total amount of fill used to secure all piles associated with a structure shall not exceed 10 cubic yards, but is limited to the minimum amount necessary to secure the piles. Fill material is limited to clean rock and concrete. Concrete footings must be poured in the dry when possible and always in tightly sealed forms.
13. Concrete footings must have at least 1 foot of natural substrate placed above the footing to prevent exposure of footings.
14. For impact pile driving of steel piling 10 inches in diameter or less, a block or layers of wood at least 6 inches thick between the pile driver and piling or a bubble curtain shall be used during driving. For steel piling greater than 10 inches in diameter, both 6 inches of wood between pile driver and piling and a bubble curtain shall be used during pile driving.

Watercraft Lifts:

15. Under this RGP, only one uncovered watercraft lift may be installed at a single-use overwater structure. A maximum of two uncovered watercraft lifts may be installed at a joint-use overwater structure. Any additional lifts would need to be authorized under a different permit.

Mitigation: To minimize impacts to the aquatic environment and reduce cumulative impacts, mitigation in all its forms (avoidance, minimization, and compensation) is required for new pier/ramp/float overwater structures. The mitigation must be retained and/or maintained (as appropriate for the type of mitigation chosen) for the duration that the authorized structure is in place. For every new pier, ramp, float or second watercraft lift, the permittee must implement at least one of the following mitigation measures:

16. Mitigation measure options:
 - a. The pier width is limited to 4 feet or less.
 - b. Installation of grating covering the entire surface of the pier and ramp.
 - c. Planting a riparian area with trees and shrubs evenly interspersed. The size of the riparian area must be at least a 1:1 ratio with the amount of overwater coverage. For example, if a 320 square foot pier is proposed, 320 square feet of riparian area must be planted for this mitigation measure. Before the applicant selects this mitigation measure, they must have the Corps review the specific site conditions to ensure that plantings are appropriate and will be successful at the selected location. The Corps is the final authority to determine if plantings are appropriate for the site.
 - i. The prospective permittee is required to establish and preserve the planting plot at the project site for the duration that the overwater structure is in place. A

- drawing of the proposed planting area must be recorded with the Registrar of Deeds per General Condition 3 of this RGP within 60 days after final Corps authorization. Proof of this must be provided to the Corps within 65 days after the date of the Corps' RGP verification letter to the permittee.
- ii. The planting plot(s) will be planted (cuttings, burlapped roots or 1 – 5 gallon size) with native shrubs and trees.
 - iii. The plot needs to be on the property but does not need to be located adjacent to the overwater structures. However, the waterward edge of the planting area must be no further than 10 feet from the ordinary high watermark of the lake and oriented parallel to the shoreline.
 - iv. The shrubs will be planted at intervals of 3-feet on center, and the trees will be planted at intervals of 10-feet on center. *The Corps must approve the planting plan prior to issuance of a RGP verification letter.* The plant species must be from the plant list in Appendix E or must be a species approved by the Corps.
 - v. Performance Standards. One hundred percent survival of all planted trees and shrubs is required during the first and second years after planting the plot(s). During the third through fifth years after planting, a minimum 80 percent survival is required. The permittee must protect the planting plot(s) against predation—the Corps recommends fencing. Individual plants that die must be replaced with native shrubs and trees taken from the plant list in Appendix E. Maintenance of the mitigation area includes removal and replacement of dead or dying plants and removal of invasive and/or noxious weeds. Maintenance does not include trimming or mowing of the mitigation plants. The mitigation plants must be allowed to develop naturally. If during the 5 years of monitoring, contingency plans are required (e.g., irrigation, additional plantings, planting different species), the permittee must implement any Corps-required contingency plans.
 - vi. Mitigation planting monitoring reports will be due annually, no later than November 30 of each monitoring year, for 5 years from when Corps accepts the as-built drawings. The mitigation monitoring report will include written and photographic documentation of tree and shrub mortality and replanting efforts. Photographs must be taken between June – August (the best time of year to show plant growth). Photographs must show a panoramic view of the entire mitigation planting area. Set points from where photos are taken must be established and used repeatedly for each monitoring year. The date of the photos must be noted on the monitoring report. The permittee can meet this reporting requirement by submitting to the Corps a completed *Mitigation Planting Monitoring Report for RGP-4*, Appendix F.
- d. Installation of large woody material (LWM).
- i. The LWM must cover at least an area equal to the amount of overwater coverage of the proposed structures (e.g., 1:1 ratio).
 - ii. The LWM must have complex structure (e.g., branches and/or root wads).
 - iii. The LWM must be placed at or landward of the 1079 foot elevation contour so that the maximum amount of water covers the structure for the entire year.
 - iv. The LWM must not interfere with navigation.
 - v. The placement of the LWM must be completed within one year of RGP verification. A report on the installation must be submitted to the Corps no later than 12 months from the date of permit issuance. The permittee can meet this reporting requirement by submitting to the Corps a completed *Status Report for Mitigation Work Completion for RGP-4*, Appendix G. The report must include

photographic documentation showing the installation of the LWM from the installation vessel. The photographs should be taken facing the shoreline and should show landmarks on the shoreline to verify the location of the placement of the LWM. In addition, the documentation must include the latitude and longitude and elevation of the LWM.

- e. Use of a Corps approved in-lieu fee (ILF) program or mitigation bank
 - i. The applicant must submit a draft Statement of Sale, Bank Use Plan, or other documentation as required to use the ILF program or mitigation bank for the Corps' review and approval before the RGP verification is complete.
 - ii. The applicant shall complete the ILF or mitigation bank transaction and provide documentation to the U.S. Army Corps of Engineers, Seattle District, Regulatory Branch, that the transaction has been completed no later than 60 days from the date of the RGP verification letter.
- f. Use of other Corps-approved project- and site-specific mitigation. The applicant may propose an alternate form of compensatory mitigation. However, the Corps is the sole authority to determine if the compensatory mitigation is appropriate and adequate to compensate for impacts to waters of the U.S. The applicant must comply with all Special Conditions added to the RGP verification to ensure the mitigation is successfully implemented.

Work in the Dry:

17. All work shall occur in the dry whenever practicable.

Prohibition of Discharge of Fill in Wetlands:

18. No fill permitted herein shall be placed in wetlands. Non-fill structure placement in or over wetlands shall be limited to the minimum amount necessary.

Revegetation of Disturbed Riparian Areas:

19. Disturbance of bank vegetation shall be limited to the minimum amount necessary to accomplish the project. Disturbed bank vegetation shall be replaced with native, locally adapted species appropriate for the site.

Preservatives:

20. No paint, stain, preservative or other protective coating application shall occur while the structure is in or over the water body, and any such application shall be completely cured prior to the structure being returned to the water. Creosote, pentachlorophenol, or copper naphthalene shall not be used to treat piling and lumber.

Equipment Operation:

21. Equipment shall be operated from the top of the bank, work platform, or similar out-of-water location whenever possible. Equipment shall be operated in a manner that minimizes the suspension of particulates. All equipment used in or around waters shall be clean and inspected daily prior to use to ensure that the equipment has no fluid leaks. Should a leak develop during use, the leaking equipment shall be removed from the site immediately and not used again until it

has been adequately repaired. No equipment may be stored or fueled within 100 feet of the waterbody.

22. If heavy equipment is used to accomplish the work, a Spill Prevention, Control, and Countermeasure (SPCC) plan must be implemented. A copy of the SPCC plan must be available to the Corps upon request during all construction activities.

RGP GENERAL CONDITIONS

Department of the Army authorization under this RGP is subject to the following General Conditions:

1. **Reliance on Permittee's Information.** In verifying a permittee's authorization under this RGP, the Department of the Army has relied, in part, on the information provided by the permittee. If this information proves to be false, incomplete, or inaccurate, the permittee's authorization may be modified, suspended, or revoked, in whole or in part. If the authorization is revoked, any work completed under the authorization must be removed, without expense to the United States.
2. **Compliance with Terms and Conditions.** Projects authorized by this RGP shall comply with all terms and conditions herein. Failure to abide by these terms and conditions invalidates this authorization and may result in a violation of Federal law, which may require that the permittee restore the site or take other remedial action. Activities requiring Department of the Army authorization that are not specifically authorized by this RGP are prohibited unless authorized by another Department of the Army permit.
3. **Deed Restriction:** For projects with mitigation or a joint-use agreement, a copy of the completed Appendix A, permit drawings, mitigation planting plan or joint-use agreement (if applicable), and final authorization letter shall be recorded with the local government (Registrar of Deeds of the county or city), within 60 days after final Corps authorization, to ensure that subsequent property owners are aware of the construction, use, and mitigation requirements. Proof of this must be provided to the Corps within 65 days after the date of the Corps' RGP verification letter to the permittee.
4. **Contractor's Copy of Permit.** The permittee shall provide complete copies of this permit and the Corps verification letter for the authorized project to each contractor involved in the project and keep copies of this permit and Corps verification letter available for inspection at the project site.
5. **Compliance Certification.** Every permittee shall submit to the Corps, within 30 days of completing the authorized work, certification that the work, including any required mitigation, was conducted in accordance with the provisions of this RGP, including case-specific special conditions. The permittee must use the Statement of Compliance Form (Appendix B) of this RGP.
6. **Access for Inspection.** The permittee shall allow the District Engineer or their authorized representative to inspect the project whenever deemed necessary to ensure that the activity is in compliance with the terms and conditions prescribed herein.
7. **Limits of Authorization.** This permit does *not*:
 - a. Obviate the requirement to obtain all other Federal, State, or local authorizations required by law for the activity authorized herein, including any authorization required from Congress.

- b. Convey any property rights, either in real estate or material, or any exclusive privileges.
 - c. Authorize any injury to property, invasion of rights, or any infringement of Federal, State, or local laws or regulations.
 - d. Authorize the interference with any existing or proposed Federal project.
8. Limits of Federal Liability. This permit is not an approval of the design features of any authorized project or an implication that such project is adequate for the intended purpose; a Department of the Army permit merely expresses the consent of the Federal Government to conduct the proposed work insofar as public rights are concerned. In issuing this RGP, the Federal Government does not assume any liability for the following:
- a. Design or construction deficiencies associated with the authorized work.
 - b. Damages to the permitted project or uses thereof as a result of other permitted activities or from natural causes, such as flooding.
 - c. Damages to persons, property, or to other permitted or unauthorized activities or structures caused by the activity authorized by this permit.
 - d. Damages associated with any future modification, suspension, or revocation of this permit.
 - e. The removal, relocation, or alteration of any structure or work in navigable waters of the United States ordered by the Secretary of the Army or their authorized representative.
 - f. Damage to the permitted project or uses thereof as a result of current or future activities undertaken by, or on behalf of, the United States in the public interest.
9. Tribal Rights. No activity may impair reserved tribal rights, including, but not limited to, reserved water rights and treaty fishing and hunting rights.
10. State-Owned Aquatic Lands. Projects proposed on state-owned aquatic lands will require a Use Authorization from the Washington Department of Natural Resources. Applicants should call (360) 902-1100 for more information.
11. Obstruction of Navigation. The permittee understands and agrees that, if future operations by the United States require the removal, relocation, or other alteration of the work herein authorized, or if, in the opinion of the Secretary of the Army or their authorized representative, said structure or work unreasonably obstructs the full and free use of navigable waters of the United States, the permittee shall, upon due notice from the Corps, remove, relocate, or alter the obstructions caused thereby, without expense to the United States. If the permittee fails to comply with the direction of the Corps, the District Engineer may restore the navigable capacity of the waterway, by contract or otherwise, and recover the cost thereof from the permittee.
12. Stability. The permittee shall design projects to be stable against the forces of flowing water, wave action, and the wake of passing vessels.

13. Maintenance. The permittee shall properly maintain all authorized structures, including maintenance necessary to ensure public safety. The permittee must obtain the appropriate authorization from the Corps before maintenance work occurs. This RGP or Nationwide Permit 3 may authorize any required maintenance activities on the structures authorized by this RGP.
14. Marking Structures. The permittee shall install and maintain any lights, signals, or other appropriate markers necessary to clearly designate the location of structures or work that might pose a hazard to public safety. Permittees shall abide by U.S. Coast Guard requirements concerning the marking of structures and work in navigable waters of the United States.
15. Endangered Species. This RGP does not authorize any activity that is likely to jeopardize the continued existence of a threatened or endangered species or a species proposed for such designation, as identified under the Endangered Species Act.
16. Essential Fish Habitat. This RGP does not authorize any activity that may adversely affect Essential Fish Habitat as defined under the Magnuson-Stevens Fishery Conservation and Management Act.
17. Historic Properties. This RGP does not authorize any activity that may affect historic properties listed, or eligible for listing, in the National Register of Historic Places (NRHP) until the provisions of 33 CFR 325, Appendix C, have been satisfied. Historic properties include prehistoric and historic archeological sites, and areas or structures of cultural interest. A prospective permittee must notify the District Engineer if the proposed activity may affect an historic property that is listed, eligible for listing, or may be eligible for listing in the NRHP, and shall not begin the activity until notified by the District Engineer that the requirements of the National Historic Preservation Act have been satisfied and that the activity is authorized. If a previously unknown historic property is encountered during work authorized by this RGP, the permittee shall immediately cease all ground disturbing activities in the immediate area and notify the Corps within 1 business day of discovery. The permittee shall perform any work required by the Corps in accordance with Section 106 of the National Historic Preservation Act and Corps regulations and avoid any further impact to the property until the District Engineer verifies that the requirements of 33 CFR Part 325, Appendix C, have been satisfied.
18. Water Quality Standards. All activities authorized herein that involve a discharge of dredged or fill material into waters of the United States shall, at all times, remain consistent with all applicable water quality standards, effluent limitations and standards of performance, prohibitions, pretreatment standards, and management practices established pursuant to the Clean Water Act (P.L. 92-500; 86 Stat. 816) or pursuant to applicable State and local law.
19. Soil Erosion and Sediment Controls. The permittee shall use and maintain appropriate erosion and sediment controls in effective operating condition and permanently stabilize all exposed soil and other fills, including any work below the ordinary high water mark at the earliest practicable date using native vegetation to the maximum extent practicable. The permittee shall remove all installed controls as soon as they are no longer needed to control erosion or sediment.
20. Aquatic Life Movements. The permittee shall not substantially disrupt the necessary life-cycle movement of those species of aquatic life indigenous to the waterbody, including those species that normally migrate through the area.

21. Management of Water Flows. To the maximum extent practicable, the activity must be designed to maintain downstream flow conditions. Furthermore, the activity shall not permanently restrict or impede the passage of normal or expected high flows. The permittee should limit the work conducted in waters of the United States to low- or no-flow periods.
22. Water Supply Intakes. The permittee shall ensure that activities authorized by this RGP have no more than a minimal adverse impact on public water supply intakes.
23. Suitable Material. Any material or structure placed in waters of the United States, whether temporary or permanent, shall be free of pollutants in toxic amounts.
24. Disposal of Excess Material. All construction debris and any other material not authorized by the Corps for permanent placement into waters of the United States shall be disposed of in an appropriate upland location in a manner that precludes it from entering waters of the United States.
25. Removal of Temporary Fills. Temporary fills must be removed in their entirety and the affected area returned to pre-construction contours and condition.
26. Transfer of RGP Verification. If the permittee sells the property associated with a RGP verification, the permittee may transfer the RGP verification to the new owner by having the new owner submit a letter to the Seattle District Corps office to validate the transfer. A transfer must occur if mitigation or a joint-use agreement is associated with the verification so that the new owner is aware of requirements. A copy of the RGP verification letter and permit drawings must be attached to the transfer letter, and the letter must contain the following statement and the new owner(s) signature: "I (we) understand that the structures or work authorized by this RGP verification have specific terms and conditions, including (if applicable) mitigation and joint-use requirements. I (we) understand that these terms and conditions will continue to be binding on us as the new owner(s) of the property as well as the associated liabilities associated with compliance with its terms and conditions."

Water Quality Certification: The Corps requested that the Washington Department of Ecology (Ecology) certify that activities authorized by this RGP for which these agencies are responsible, will not violate established water quality standards. Ecology did not make a water quality certification decision within the required time frame; therefore, water quality certification has been waived.

Endangered Species: The Endangered Species Act of 1973 (ESA), as amended, requires all federal agencies to consult with the National Marine Fisheries Service (NMFS) and/or U.S. Fish and Wildlife Service (USFWS), pursuant to Section 7 of the ESA, on any action, or proposed action, permitted, funded, or undertaken by the agency that may affect a species listed as threatened or endangered under the ESA, or its designated critical habitat. The Corps has determined that activities that would be authorized by this RGP have no effect on any ESA-listed species.

Essential Fish Habitat: The Magnuson-Stevens Fishery Conservation and Management Act (MSA), as amended by the Sustainable Fisheries Act of 1996, requires all Federal agencies to consult with the NMFS on all actions, or proposed actions, permitted, funded, or undertaken by the agency that may adversely affect Essential Fish Habitat (EFH). This RGP will not adversely affect EFH for federally managed fisheries in Washington waters. No further consultation is required.

Modification, Suspension, or Revocation of the RGP: This RGP may be modified, suspended, or revoked in whole or in part if the Secretary of the Army or their authorized representative determines that the individual or cumulative impacts of work that would be authorized using this procedure are contrary to the public interest. Any such modification, suspension, or revocation shall become effective 30 days after the issuance of a public notice announcing such action. The final decision whether to modify, suspend, or revoke this permit, in whole or in part, shall be made pursuant to procedures prescribed by the Chief of Engineers. Following such revocation, any future activities heretofore authorized by this RGP will require alternate Department of the Army authorization.

The authorization of an individual project under this RGP may also be summarily modified, suspended, or revoked, in whole or in part, if the permittee either fails to abide by the terms and conditions of this permit or provides information that proves to be false, incomplete, or inaccurate, or, upon a finding by the District Engineer that such action would be in the public interest. If a permittee's authorization is revoked, the permittee shall, upon notice of such revocation, without expense to the United States and in such time and manner as the Secretary of the Army or their authorized representative may direct, restore the waterway to its former condition. If the permittee fails to comply with the direction of the Secretary of the Army or their authorized representative, the Secretary or their designee may restore the waterway to its former condition, by contract or otherwise, and recover the cost thereof from the permittee.

Expiration of the RGP: This permit shall become effective on the date of the signature of the District Engineer or their authorized representative and will automatically expire five years from that date unless the permit is modified, revoked, or extended prior to that date. Activities that have commenced (e.g., are under construction) or are under contract to commence in reliance upon this permit will remain authorized provided that the activity is completed within one year of the date of this permit's expiration, modification, or revocation, unless discretionary authority has been exercised on a case-by-case basis to modify, suspend, or revoke the authorization.

Appendix A: RGP-4 Application Form

Appendix B: Compliance Form

Appendix C: Drawing Checklist

Appendix D: Map of Southern Lake Chelan

Appendix E: Plant List and Example Planting Plan

Appendix F: Riparian Mitigation Planting Monitoring Report for RGP-4

Appendix G: Status/As-built Report for Mitigation Work Completion for RGP-4

APPENDIX A
Application Form for Regional General Permit 4 (RGP-4)
May 13, 2011

Please fully complete a JARPA, this form and submit with vicinity, plan, and elevation drawings and any other relevant information. Submit the information to: U.S. Army Corps of Engineers, Regulatory Branch, P.O. Box 3755, Seattle, Washington 98124-3755.

SECTION A - Eligibility for RGP [Section A will be completed by the Corps]	
1. Corps reference number: _____	
2. This application:	
<input type="checkbox"/> Meets all of the requirements of RGP-4. <input type="checkbox"/> Does not meet all of the requirements of RGP-4.	
Date Corps Review Completed: _____ By: _____	

SECTION B - General Information			
3. Date:			
4. Applicant name:			
Mailing address:			
Work phone:	Home phone:	Email:	Fax:
Mailing address:			
Work phone:	Home phone:	Email:	Fax:
5. Authorized agent name:			
Mailing address:			
Work phone:	Home phone:	Email:	Fax:
6. Location where proposed work will occur (street address, city, county):			
Location of joint-use property (street address, city, county):			
Waterbody:			
¼ Section:	Section:	Township:	Range:
Latitude:	Longitude:		

7. **Work Type:** This RGP is for noncommercial use only. Please check the appropriate box(es):

- Maintenance of any work authorized by this RGP or by a previously issued Department of the Army permit
- Modification of any work authorized by this RGP or by a previously issued Department of the Army permit
- Retention of _____

New Construction/Installation of: (Check all that apply)

- Pier
- Ramp
- Float
- Piling
- Concrete Footings
- Watercraft Lift

8. **Brief Project Description** Describe what you plan to do, dimensions of each element of the proposed work and work area, amount of fill and/or excavated material, and how you plan to construct each element. (If this information is in the JARPA, simply reference the relevant sections in the JARPA.)

SECTION C – RGP-4 Project Impact Reduction and Conservation Measures (CMs)

In order to minimize impacts on the aquatic environment and reduce cumulative impacts from work authorized under RGP-4, all applicable CMs summarized below must be implemented. Place an X in the “Yes” column if you will be implementing the CM or an X in the “No” column if you will not implement the CM. Place an X in the “N/A” column if the CM is not applicable to your project.

If you checked “No” you must explain why you cannot meet the CM in the Specific Project Information column. Note: If you check “No” for any box, then the work cannot be authorized by this RGP.

Yes	No	N/A	Construction Specifications and Conservation Measures	Specific Project Information (complete if “No” was checked)
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<u>Maintenance:</u> 1. Any maintenance performed on an authorized structure shall not change the size or configuration from that which was originally authorized unless the changes are environmentally beneficial and reduce the size of the structure.	

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<p><u>Piers, Ramps, and Floats:</u></p> <p>2. This permit authorizes only one pier/ramp/float structure per property. This property must front Lake Chelan. Submerged structural components of piers, ramps, and floats, including concrete footings, framing, and cross bracing shall be minimized to that which is required for structural stability.</p>	
--------------------------	--------------------------	--------------------------	---	--

Yes	No	N/A	Construction Specifications and Conservation Measures	Specific Project Information (complete if "No" was checked)
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	3. This permit authorizes a joint-use pier/ramp/float structure constructed by more than one private property owner fronting the shoreline. All joint-use properties shall front the waterway. All affected joint-use property owners must sign a legal agreement to construct a joint-use pier/ramp/float structure. At a minimum, the agreement shall include a statement from each property owner that they voluntarily agree to build no additional overwater structures on their property except for the maintenance or modification of the joint-use overwater structure which is the subject of the permit application. A copy of this agreement must be submitted with the application.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	4. Piers, ramps, and/or floats shall not extend more than 55 feet waterward (toward the middle of the lake) of the ordinary high water mark. A greater length may be authorized up to the minimum length necessary to reach water of sufficient depth for safe boat moorage at the waterward end of the structure.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	5. A float system must be held in place by piling or other fixed structures, and may consist of more than one individual float. Float stoppers must be installed so that the float does not rest on the substrate at any time.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	6. The width of any individual section of deck shall not exceed 6 feet for piers and floats and 4 feet for ramps.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	7. Total deck area of <u>single-use</u> piers, floats, ramps, and other overwater structures waterward of the ordinary high water mark shall not exceed 320 square feet. If it is necessary to have a single-use structure greater than 55 feet in length because of water depth limitations referenced in CM 4, the total area of the structures shall not exceed 450 square feet.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	8. Total deck area of <u>joint-use</u> piers, floats, ramps, and other overwater structures waterward of the ordinary high water mark, shall not exceed 450 square feet.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	9. Only open pile pier construction is authorized.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	10. Flotation for the float shall be fully enclosed and contained in a shell (e.g., polystyrene tubs not shrink wrapped or sprayed coatings) that prevents breakup or loss of the flotation material into the water and is not readily subject to damage by ultraviolet radiation or abrasion caused by rubbing against piling or waterborne debris.	

Yes	No	N/A	Construction Specifications and Conservation Measures	Specific Project Information (complete if "No" was checked)
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	11. No other structures or shading objects such as, but not limited to, storage boxes, benches, planters, sheds, tables, outdoor furniture, living quarters, fueling facilities, carpeting, or covered boat moorage shall be constructed or installed on any overwater structure authorized under this RGP.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	12. Fill around piling may only be used when the condition of the substrate prevents the use of driven piles. The total amount of fill used to secure all piles associated with a structure shall not exceed 10 cubic yards, but is limited to the minimum amount necessary to secure the piles. Fill material is limited to clean rock and concrete. Concrete footings must be poured in the dry when possible and always in tightly sealed forms.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	13. Concrete footings must have at least 1 foot of natural substrate placed above the footing to prevent exposure of footings.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	14. For impact pile driving of steel piles 10 inches in diameter or less, a block or layers of wood at least 6 inches thick between the pile driver and pile or a bubble curtain shall be used during driving. For steel pile greater than 10 inches in diameter, both 6 inches of wood between pile driver and pile, and a bubble curtain shall be used during driving.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<u>Watercraft Lift:</u> 15. Under this RGP, only one uncovered watercraft lift may be installed at a single-use overwater structure. A maximum of two uncovered watercraft lifts may be installed at a joint-use overwater structure. Any additional lifts would need to be authorized under a different permit.	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<u>Mitigation:</u> The mitigation must be retained and/or maintained for the duration that the authorized structure is in place. For every <u>new</u> pier, ramp, float or <u>second</u> watercraft lift, the permittee must implement at least <u>one</u> of the following mitigation measures: 16. Mitigation measure options: a. The pier width is limited to 4 feet or less. b. Installation of grating covering the entire surface of the pier and ramp. c. Planting a riparian area with trees and shrubs evenly interspersed. The size of the riparian area must be at least 1:1 ratio with the amount of overwater coverage. For example, if a 320 square foot pier is proposed, 320 square feet of riparian area must be planted for this mitigation measure. Before the applicant selects this mitigation measures, they must have the Corps review the specific site conditions to ensure that plantings are appropriate and will be successful at the selected location. i. The prospective permittee is required to establish	

Yes	No	N/A	Construction Specifications and Conservation Measures	Specific Project Information (complete if "No" was checked)
			<p>and preserve the planting plot at the project site for the duration that the overwater structure is in place. A drawing of the proposed planting area must be recorded with the Registrar of Deeds per General Condition 3 of this RGP within 60 days after final Corps authorization. Proof of this must be provided to the Corps within 65 days after the date of the Corps' RGP verification letter to the permittee.</p> <ul style="list-style-type: none"> ii. The planting plot(s) will be planted (cuttings, burlapped roots or 1 – 5 gallon size) with native shrubs and trees. iii. The plot needs to be on the property but does not need to be located adjacent to the overwater structures. However, the waterward edge of the planting area must be no further than 10 feet from the ordinary high watermark of the lake and oriented parallel to the shoreline. iv. The shrubs will be planted at intervals of 3-feet on center, and the trees will be planted at intervals of 10-feet on center. <i>The Corps must approve the planting plan prior to issuance of a RGP verification letter.</i> The plant species must be from the plant list in Appendix E or must be a species approved by the Corps. v. Performance Standards. One hundred percent survival of all planted trees and shrubs is required during the first and second years after planting the plot(s). During the third through fifth years after planting, a minimum 80 percent survival is required. The permittee must protect the planting plot(s) against predation—the Corps recommends fencing. Individual plants that die must be replaced with native shrubs and trees taken from the plant list in Appendix E. Maintenance of the mitigation area includes removal and replacement of dead or dying plants and removal of invasive and/or noxious weeds. Maintenance does <u>not</u> include trimming or mowing of the mitigation plants. The mitigation plants <u>must</u> be allowed to develop naturally. If during the 5 years of monitoring, contingency plans are required (e.g., irrigation, additional plantings, planting different species), the permittee must implement any Corps-required contingency plans. vi. Mitigation planting monitoring reports will be due annually, no later than November 30 of each monitoring year, for 5 years from when Corps accepts the as-built drawings. The mitigation monitoring report will include written and photographic documentation of tree and shrub mortality and replanting efforts. Photographs 	

Yes	No	N/A	Construction Specifications and Conservation Measures	Specific Project Information (complete if "No" was checked)
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<p>must be taken between June – August (the best time of year to show plant growth). Photographs must show a panoramic view of the entire mitigation planting area. Set points from where photos are taken must be established and used repeatedly for each monitoring year. The date of the photos must be noted on the monitoring report. The permittee can meet this reporting requirement by submitting to the Corps a completed <i>Mitigation Planting Monitoring Report for RGP-4</i>, Appendix F.</p> <p>d. Installation of large woody material (LWM).</p> <ul style="list-style-type: none"> i. The LWM must cover at least an area equal to the amount of overwater coverage of the proposed structures (e.g., 1:1 ratio). ii. The LWM must have complex structure (e.g., branches and/or root wads). iii. The LWM must be placed at or landward of the 1079 foot elevation contour so that the maximum amount of water covers the structure for the entire year. iv. The LWM must not interfere with navigation. v. The placement of the LWM must be completed within one year of RGP verification. A report on the installation must be submitted to the Corps no later than 12 months from the date of permit issuance. The permittee can meet this reporting requirement by submitting to the Corps a completed <i>Status Report for Mitigation Work Completion for RGP-4</i>, Appendix G. The report must include photographic documentation showing the installation of the LWM from the installation vessel. The photographs should be taken facing the shoreline and should show landmarks on the shoreline to verify the location of the placement of the LWM. In addition, the documentation must include the latitude and longitude and elevation of the LWM. 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<p>e. Use of a Corps approved in-lieu fee (ILF) program or mitigation bank</p> <ul style="list-style-type: none"> i. The applicant must submit a draft Statement of Sale, Bank Use Plan, or other documentation as required to use the ILF program or mitigation bank for the Corps' review and approval before the RGP verification is complete. ii. The applicant shall complete the ILF or mitigation bank transaction and provide documentation to the U.S. Army Corps of Engineers, Seattle District, Regulatory Branch, that the transaction has been completed no later than 60 days from the 	

Yes	No	N/A	Construction Specifications and Conservation Measures	Specific Project Information (complete if "No" was checked)
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<p>date of the RGP verification letter.</p> <p>f. Use of other Corps-approved project- and site-specific mitigation. The applicant may propose an alternate form of compensatory mitigation. However, the Corps is the sole authority to determine if the compensatory mitigation is appropriate and adequate to compensate for impacts to waters of the U.S. The applicant must comply with all Special Conditions added to the RGP verification to ensure the mitigation is successfully implemented.</p>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<p><u>Work in the Dry:</u> 17. All work shall occur in the dry whenever practicable.</p>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<p><u>Prohibition of Discharge of Fill in Wetlands:</u> 18. No fill permitted herein shall be placed in wetlands. Non-fill structure placement in or over wetlands shall be limited to the minimum amount necessary.</p>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<p><u>Revegetation of Disturbed Riparian Areas:</u> 19. Disturbance of bank vegetation shall be limited to the minimum amount necessary to accomplish the project. Disturbed bank vegetation shall be replaced with native, locally adapted species appropriate for the site.</p>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<p><u>Preservatives</u> 20. No paint, stain, preservative or other protective coating application shall occur while the structure is in or over the water body, and any such application shall be completely cured prior to the structure being returned to the water. Creosote, pentachlorophenol, or copper naphthalene shall not be used to treat piling and lumber.</p>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<p><u>Equipment Operation:</u> 21. Equipment shall be operated from the top of the bank, work platform, or similar out-of-water location whenever possible. Equipment shall be operated in a manner that minimizes the suspension of particulates. All equipment used in or around waters shall be clean and inspected daily prior to use to ensure that the equipment has no fluid leaks. Should a leak develop during use, the leaking equipment shall be removed from the site immediately and not used again until it has been adequately repaired. No equipment may be stored or fueled within 100 feet of the waterbody.</p>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<p>22. If heavy equipment is used to accomplish the work, a Spill Prevention, Control, and Countermeasure (SPCC) plan must be implemented. A copy of the SPCC plan must be available to the Corps upon request during all construction activities.</p>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<p>Compliance with RGP General Conditions 1 through 26 of RGP-4. Refer to full text of RGP-4 for the list of General Conditions.</p>	

THIS APPLICATION IS HEREBY MADE FOR A PERMIT OR PERMITS TO AUTHORIZE THE ACTIVITIES DESCRIBED HEREIN. I CERTIFY THAT I AM FAMILIAR WITH THE INFORMATION CONTAINED IN THIS APPLICATION, AND THAT TO THE BEST OF MY KNOWLEDGE AND BELIEF, SUCH INFORMATION IS TRUE, COMPLETE, AND ACCURATE. I FURTHER CERTIFY THAT I POSSESS THE AUTHORITY TO UNDERTAKE THE PROPOSED ACTIVITIES. I HEREBY GRANT TO THE AGENCIES TO WHICH THIS APPLICATION IS MADE, THE RIGHT TO ENTER THE ABOVE-DESCRIBED LOCATION TO INSPECT THE PROPOSED, IN-PROGRESS, OR COMPLETED WORK. I VOLUNTARILY AGREE TO MEET ALL REQUIREMENTS OF THIS RGP. I AGREE TO START WORK ONLY AFTER ALL NECESSARY PERMITS HAVE BEEN RECEIVED.

Signature of Applicant

Date

Signature of Co-Applicant

Date

Signature of Authorized Agent

Date

APPENDIX B – COMPLIANCE FORM

Statement of Compliance Form

Regional General Permit CENWS-OD-RG-RGP-4

Within 30 days of completing the authorized work, you must fill out and sign this statement of compliance form and submit it to: U.S. Army Corps of Engineers, Regulatory Branch, P.O. Box 3755, Seattle, WA 98124-3755.

1. U.S. Army Corps of Engineers Reference Number: _____
(use the Reference Number on your RGP verification letter)

2. Permittee’s name, address, and telephone number:

3. Contractor’s name, address, telephone number, and point of contact:

4. Description of completed work (if applicable, attach as-built drawings and/or written explanation if the completed work varies from the original plans, the drawings must include information as detailed on Appendix C – *Drawing Checklist*)

5. Status of mitigation and/or planting plan (if required):

6. Dates of Work: The work was initiated on _____ and completed on _____.

I hereby certify that I have conducted the above-described work in compliance with the terms and conditions of this permit, including any project-specific conditions required by the District Engineer to ensure that this work would have no more than minimal adverse impact on the aquatic environment. I further certify that I have fully implemented any compensatory mitigation required by the District Engineer as a condition of this authorization.

Signature of Permittee

Date

APPENDIX C – DRAWING CHECKLIST

1. GENERAL

- Use clear black lettering and fewest number of sheets possible; use 8 1/2- by 11-inch sheets
- State the purpose of the proposed or existing work
- List property owners and indicate number by number on plan view drawing
- Show datum used in plan and elevation drawings
- Use a graphic scale on all drawings
- Use a north arrow; prepare drawing with north being directed to the top of the page
- Label all proposed and existing work as such (e.g., Proposed Pier, Proposed Fill...)

2. TITLE BLOCK

- A completed title block (first example) must be on first sheet; for subsequent sheets you can use the abbreviated form (second example)

PURPOSE: DATUM: ADJACENT PROPERTY OWNERS: 1. 2.	APPLICANT Reference Number LOCATION ADDRESS	PROPOSED: IN: NEAR/AT: COUNTY: STATE: WA SHEET * OF * DATE:
---	---	--

Reference #: Applicant: Proposed: At Washington Sheet * of * Date
--

3. VICINITY MAP

- Clearly show location of project (e.g., arrow, circle, etc.)
- List latitude, longitude, section, township, and range
- Name waterways
- Show roads, streets, and/or mileage to nearest town or city limits

4. PLAN VIEW


- Show shorelines:
 - Tidal: Show mean high water (MHW) line, mean higher high water (MHHW) line
 - Lakes or streams: Show the ordinary high water (OHW) line.
- Show dimensions of proposed structures/fills; distance to property lines; encroachment beyond applicable shoreline; show wetland boundaries and specific impacts to wetlands
- Indicate location, quantity, and type of fill, if any
- Show all existing structures or fills on subject and adjacent properties
- Show direction of currents such as tidal ebb and flood
- Indicate adjacent property ownership

5. ELEVATION AND/OR SECTION VIEW

- Show shorelines, MHW line, MHHW line, OHW line, wetland boundary
- Show original and proposed elevations, water depths, dimensions of proposed structures or fills, and pertinent vertical dimensions to top and base of structure/fill; use the same vertical and horizontal scale, if possible.

APPENDIX D - MAP OF SOUTHERN LAKE CHELAN

RGP-4 only authorizes work in Southern Lake Chelan. The upper limits of Southern Lake Chelan are shown on this map.

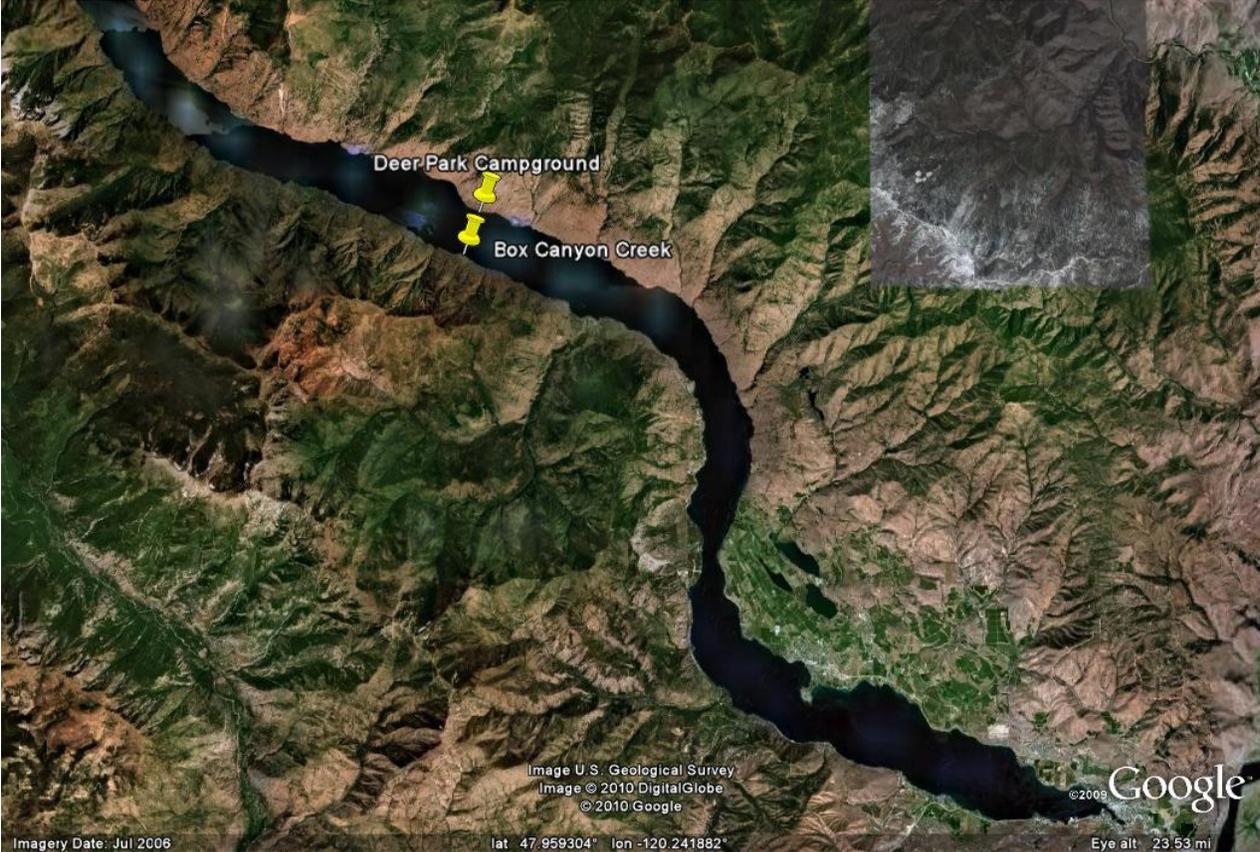


APPENDIX E

Plant List and Example Planting Plan

List of Approved Plant Species

Common Name	Scientific Name
Shrubs:	
Serviceberry	<i>Amelanchier alnifolia</i>
Tall Oregon-grape	<i>Berberis aquifolium</i>
Sticky-laurel/Snowbrush	<i>Ceanothus velutinus</i>
Red-twig Ceanothus	<i>Ceanothus sanguineus</i>
Virgin's bower	<i>Clematis ligusticifolia</i>
Redosier dogwood	<i>Cornus sericea</i>
Ocean spray	<i>Holodiscus discolor</i>
Western Juniper	<i>Juniperus occidentalis</i>
Rocky Mountain juniper	<i>Juniperus scopulorum</i>
Black twinberry	<i>Lonicera involucrata</i>
Utah honeysuckle	<i>Lonicera utahensis</i>
Mock orange	<i>Philadelphus lewisii</i>
Black chokecherry	<i>Prunus virginiana</i> var. <i>melanocarpa</i>
Mallow ninebark	<i>Physocarpus malvaceus</i>
Golden currant	<i>Ribes aureum</i>
Wild rose	<i>Rosa gymnocarpa</i>
Wood's rose	<i>Rosa woodsii</i>
Peach-leaf willow	<i>Salix amygdaloides</i>
Bebb's willow	<i>Salix bebbiana</i>
Trees:	
Douglas Maple	<i>Acer glabrum</i> var. <i>douglasii</i>
Gray alder	<i>Alnus incana</i>
White alder	<i>Alnus rhombifolia</i>
Sitka alder	<i>Alnus sinuata</i>
Water birch	<i>Betula occidentalis</i>
Paper birch	<i>Betula papyrifera</i>
Hackberry	<i>Celtis reticulata</i>
Black hawthorn, douglas	<i>Crataegus douglasii</i> var. <i>douglasii</i>
Ponderosa pine	<i>Pinus ponderosa</i>
Black cottonwood	<i>Populus balsamifera</i>
Quaking aspen	<i>Populus tremuloides</i>

EXAMPLE PLANTING PLAN:

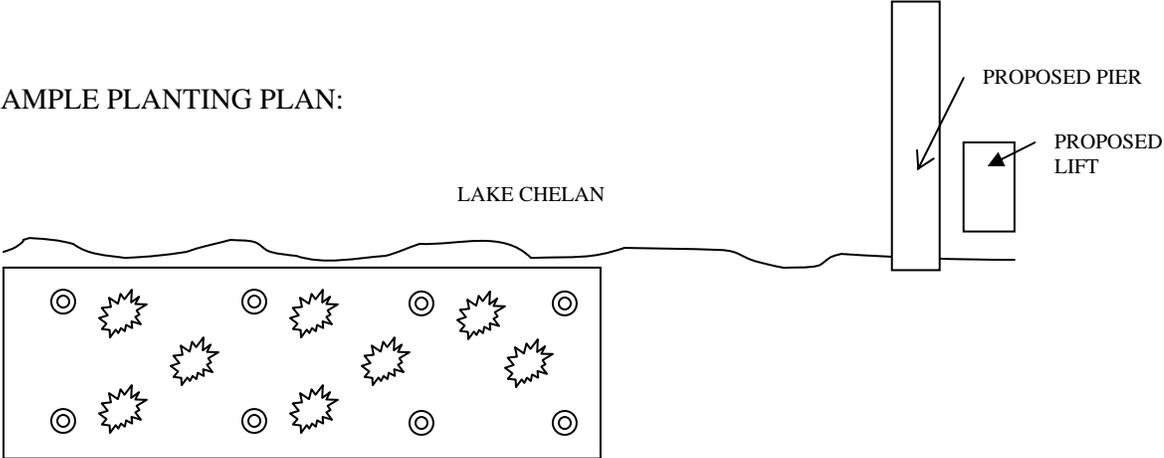

8 Trees and 8 Shrubs

- ⊙ P. balsaminifera
10 feet on center
- ★ S. proluxa
3 feet on center

PLAN VIEW
Scale:
1 inch = 10 feet

APPENDIX G

Status/ As-built Report for Mitigation Work Completion for RGP-4

Within one (1) year or earlier as indicated on this form, of the date of your RGP verification letter, submit this completed form to: U.S. Army Corps of Engineers, Regulatory Branch, P.O. Box 3755, Seattle, WA 98124-3755. For riparian planting mitigation, you must complete and submit Appendix F of RGP-4 annually after the Corps accepts your as-built drawings of the mitigation construction.

Corps Reference Number: _____

Date the Corps Issued Your Permit: _____

Date this Report is Due: _____

Your Name: _____

Your Address: _____

Your City/State/Zip Code: _____

Check the authorized mitigation activity performed and include the required attachments:

- Mitigation option "a"; Pier width is 4 feet or less
Attachment: Photos of the as-built structure showing the pier width
- Mitigation option "b"; Installation of grating
Attachment: Photos of the as-built structure showing the grating
- Mitigation option "c"; Riparian plantings
Attachment: Photographs of the mitigation area (preferably taken during June – August).

Conditions of your Corps permit require 100% survival of all planted trees and shrubs during the first and second years after planting. During the third through fifth years after planting, 80% survival is required. Individual plants that die must be replaced with native species listed in RGP-4. You must protect your mitigation area—fencing is recommended.

Date of Installation	Species name of Plants	Number of Plants Installed

- Mitigation option "d"; installation of large woody material
Attachments: Photographic documentation showing installation of LWM
 Latitude, longitude and elevation of LWM
- Mitigation option "e"; Use of In-lieu fee program or mitigation bank
Attachment: Documentation showing completion of transaction (submit 60 days from the date of your RGP-4 verification letter)
- Mitigation option "f"; Other Corps-approved mitigation: _____
Date completed: _____