AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT

1. CONTRACT ID CODE	PAGE	OF PAGES
J	1	2

2. AMENDMENT/MODIFICATION NO.	3. EFFECTIVE DATE	4. REQUISITION/PURCHASE REQ. NO.	5. PROJECT NO.(If applicable)
0002	09-Jul-2003	W68MD9-3128-3254	

6. ISSUED BY CODE DACW67

USA ENGINEER DISTRICT, SEATTLE
ATTN: CENWS-CT
P.O. BOX 3755
SEATTLE WA 98124-3755

7. ADMINISTERED BY (If other than item 6) CODE

See Item 6

8. NAME AND ADDRESS OF CONTRACTOR (No., Street, County, State and Zip Code)

CODE FACILITY CODE

X	9A. AMENDMENT OF SOLICITATION NO. DACW67-03-B-0011
X	9B. DATED (SEE ITEM 11) 05-Jun-2003
	10A. MOD. OF CONTRACT/ORDER NO.
	10B. DATED (SEE ITEM 13)

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

[X] The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offer [X] is extended, [ ] is not extended.

Offer must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended by one of the following methods: (a) By completing Items 8 and 15, and returning_____ copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA (If required)

13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.

[ ] A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.

[ ] B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(B).

[ ] C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:

[ ] D. OTHER (Specify type of modification and authority)

E. IMPORTANT: Contractor [ ] is not, [ ] is required to sign this document and return _____ copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.)

DACW67-03-B-0011, Riley Creek Modernization, Albeni Falls Dam, Oldtown, Idaho

1. This amendment two (0002) provides for the following changes:

Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER (Type or print)		16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print) TEL: EMAIL:	
15B. CONTRACTOR/OFFEROR _____ (Signature of person authorized to sign)	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA BY _____ (Signature of Contracting Officer)	16C. DATE SIGNED 09-Jul-2003

EXCEPTION TO SF 30
APPROVED BY OIRM 11-84

30-105-04

STANDARD FORM 30 (Rev. 10-83)
Prescribed by GSA
FAR (48 CFR) 53.243

(1) Revisions to contract drawings, sheet nos. 3, 4, 10, and 13.

(2) Revisions to drawings by notation in the Special Clauses after the Index of Drawings, Section 00800, Attachment A.

(3) Revisions to Index of Drawings under section 00800 Attachment A to show revised drawings.

(4) Revisions to Section 01270 MEASUREMENT AND PAYMENT.

(5) Revisions to Section 10800 TOILET ACCESSORIES (addition of paragraph 3.3 Schedule).

(6) Revisions to Section 16415 ELECTRICAL WORK, INTERIOR. (under paragraph 2.2.1.1).

2. The date and time of bid opening is extended to July 17, 2003 at 2:00 p.m. LOCAL TIME.

3. The attached revised drawings supersede and replace the corresponding drawings. The attached revised specification sections supersede and replace the corresponding specification sections. Specification changes are generally identified, for convenience, by strikeout for deletions, and underlining of text for additions. All portions of the revised or new pages shall apply whether or not changes have been indicated.

4. NOTICE TO BIDDERS: Bidders must acknowledge receipt of this amendment by number and date on bid or by telegram. Please mark outside of envelope in which your bid is enclosed to show amendment received.

Encl:
Drawing, sheet nos. 3, 4, 10, and 13 (revised)
Section 00800A (revised)
Section 01270 (revised)
Section 10800 (revised)
Section 16415 (revised)

(End of Summary of Changes)

INDEX OF DRAWINGS

RILEY CREEK MODERNIZATION,
ALBENI FALLS DAM, OLDTOWN, IDAHO
DRAWING NO. E-52-44-99

SHEET NUMBER	PLATE NUMBER	TITLE	REVISION NUMBER	DATE
	GENERAL			
1	T1.0	Title Sheet		27 NOV 02
2	T1.1	Legend, Abbreviations And Sheet Index		27 NOV 02
	CIVIL			
3	C1.1	Existing Site And Site Demolition Plan	A	~~27 NOV 02~~ 2 JUL 03
4	C1.2	Paving And Parking Plan	A	~~27 NOV 02~~ 2 JUL 03
5	C1.3	Utility Plan		27 NOV 02
6	C6.1	Miscellaneous Sections And Details Sheet 1		27 NOV 02
7	C6.2	Miscellaneous Sections And Details Sheet 2		27 NOV 02
8	C6.3	Miscellaneous Sections And Details Sheet 3		27 NOV 02
9	C6.4	Details And Site Coordinate Data		27 NOV 02
	LANDSCAPE ARCHITECTURAL			
10	L1.1	Landscape Site Plan	A	~~27 NOV 02~~ 2 JUL 03
11	L1.2	Landscape Planting And Irrigation Plan		27 NOV 02
12	L1.3	Landscape Details Sheet 1		27 NOV 02
13	L1.4	Landscape Details Sheet 2	A	~~27 NOV 02~~ 2 JUL 03
14	L1.5	Landscape Details Sheet 3		27 NOV 02
15	L1.6	Landscape Details Sheet 4		27 NOV 02
16	L1.7	Landscape Details Sheet 5		27 NOV 02
17	L1.8	Landscape Details Sheet 6		27 NOV 02
18	L1.9	Landscape Details Sheet 7		27 NOV 02

SHEET NUMBER	PLATE NUMBER	TITLE	REVISION NUMBER	DATE
	ARCHITECTURAL			
19	A0.1	Architectural General Notes And Typical Details		27 NOV 02
20	A1.1	Plans And Details Sheet 1		27 NOV 02
21	A1.2	Plans And Details Sheet 2		27 NOV 02
22	A1.3	Gate House Sheet 1		27 NOV 02
23	A1.4	Gate House Sheet 2		27 NOV 02
24	A6.1	Schedules		27 NOV 02
	STRUCTURAL			
25	S1.1	Pier Plans And Details		27 NOV 02
26	S1.2	Miscellaneous Plans And Details		27 NOV 02
	MECHANICAL/ELECTRICAL			
27	ME1.1	Mechanical And Electrical Building Plans And Details Sheet 1		27 NOV 02
28	ME1.2	Mechanical And Electrical Building Plans And Details Sheet 2		27 NOV 02
	MECHANICAL			
29	M1.1	Mechanical Details		27 NOV 02
30	M1.2	Mechanical Schedules		27 NOV 02
	ELECTRICAL			
31	E1.1	Electrical Site Plan		27 NOV 02
32	E1.2	Electrical One-Line Diagram		27 NOV 02
33	E1.3	Electrical Details		27 NOV 02
34	E1.4	Electrical Panel Schedules		27 NOV 02
35	E1.5	Electrical Panel Schedules		27 NOV 02

REVISIONS TO DRAWINGS

Plate A1.1

(a) On Detail 4 RILEY CREEK 1 & 2 FLOOR PLAN change notation of "REPLACE EXISTING TOILET PARTITIONS AT RC-2 ONLY" to read "REPLACE EXISTING TOILET PARTITIONS AND URINAL SCREEN AT RC-2 ONLY."

(b) On Detail 5 RILEY CREEK 1 & 2 SIDE ELEVATION change dimension at roof line from "12′-8″ " to read "19′-8.″ "

Plate A1.2

On Detail 6 RILEY CREEK 4 FLOOR PLAN change the notation "NEW WD SCREEN WALL" to read "NEW WD SCREEN WALL. MATCH EXISTING SCREEN WALL CONSTRUCTION, SIMILAR TO DETAILS 4 AND 5 ON SHEET L1.9" (Existing screen wall matches construction of the tank screen details on L1.9.)

Plate A1.3

On Detail 8 GATE HOUSE SECTION add the notation "2X6 PLASTIC LUMBER DECKING, TYPICAL AT RAMP, DECK, STEPS, AND CARPORT STOOP."

Plate C1.3

Move location of the utility pad as shown for site #68 from the front to the back of the site in accordance with detail 1 on PL. L1.4. Change location of new waterline to connect to revised utility pad location.

Plate E1.1

Change location of new power line to correspond to location of revised utility pad location as noted for site #68 on plate C1.3.

Plate L1.1

(a) Measurement Guidelines: In case of discrepancy between trail width dimensions and scaled widths, written dimensions shall take precedence over scaled widths.

Plate L1.2

(a) Revise Symbol 4 note under Construction Legend to read "NEW TREES- SEE PLANT LEGEND BELOW AND DETAILS SHEET L1.7. FOR ADDITIONAL NEW TREES TO BE PROVIDED WITHIN CAMPSITE LOOPS, SEE TYPICAL CAMP RESTORATION DETAILS 1 & 2 ON PL. L1.5."

(b) Revise under the General Notes # 6 to read "PUMP IS A REDJACKET 10 H.P. 230 V./SINGLE PHASE PUMP, WITH 100 PSI AVAILABLE AT PUMP AND DESIGN PRESSURE OF 40 PSI."

(c) Under the General Notes add # 12 to read "EXISTING PUMP SHALL MAINTAIN EXISTING MANUAL OFF/ON SWITCH OPERATION."

REFERENCE DRAWINGS

Reference drawings provided show conditions at time of construction. These drawings are furnished for information only and the Government does not warrant that conditions will be exactly as shown. Minor deviations can be anticipated and shall not be the basis for a claim for extra compensation.

SHEET NUMBER	REFERENCE DRAWING NUMBER	TITLE	REVISION NUMBER	DATE
36	R1.1	As-Built Sheet 1		
37	R1.2	As-Built Sheet 2		
38	R1.3	Foundation Exploration		

REVISIONS TO REFERENCE DRAWINGS

NOTE: As-Built Sheets 1 and 2 were inadvertently labeled as Sheet R1.2 and R1.1, respectively. Correct the designation of As-Built Sheet 1 to indicate R1.1 and As-Built Sheet 2 to indicate R1.2.

As-Built Sheets 1 & 2

Add General Note # 1 to read "EXISTING MAINLINE PIPING FROM THE PUMP SOURCE IS 3" DIA. PVC, RUNNING TO THE ROAD, THEN RUNS WEST PARALLEL TO ENTRY ROAD TO EXISTING DRAIN VALVE AT SECONDARY PICNIC SHELTER PARKING AREA."

STANDARD DETAILS BOUND IN THE SPECIFICATIONS

DRAWING NUMBER	SHEET NUMBER	TITLE	DATE
SECTION 01501 - CONSTRUCTION FACILITIES AND TEMPORARY CONTROLS			
	1	Hard Hat Sign	10SEP90
	1, 2, & 3	Civil Works Project Identification Sign	REV 07APR88

END OF ATTACHMENT

SECTION 01270

MEASUREMENT AND PAYMENT

PART 1 GENERAL

1.1 GENERAL

The contract price shall constitute full compensation for furnishing all plant, labor, materials, appurtenances, and incidentals and performing all operations necessary to construct and complete the work in accordance with these specifications and the applicable drawings, including surveying performed by the Contractor. Payment shall be considered as full compensation, notwithstanding that minor features may not be mentioned herein. Material and work paid for under one item will not be paid for under any other item. No separate payment will be made for the work, services, or operations required by the Contractor, as specified in DIVISION 1, GENERAL REQUIREMENTS, to complete the project in accordance with these specifications; all costs thereof shall be considered as incidental to the work. Items of work for which no separate payment is provided shall be considered as incidental to the performance of the work with which it is associated.

1.2 MEASUREMENT GUIDELINES

1.2.1 Lump Sum Items

Items measured as a lump sum will be measured for payment as a complete job in the locations indicated. This measurement includes all incidental work and materials such as fittings, fasteners, electrical materials, and O&M manuals that are necessary to make a complete job. Unless the payment item paragraph makes a specific exception of any item, incidental items will not be measured under any other item even though there is another listing for the work or material.

1.2.2 Unit Quantity Items

Items measured as a unit quantity will be measured for payment by the actual quantity of material installed in place or other work as required to make a complete job.

1.3 PAYMENT ITEMS

The contract line items shown on the SCHEDULE are further described as follows:

1.3.1 Item No. 0001 (BASE ITEM):

Payment will be made at the contract lump sum price for Item No. 0001, All Work for Riley Creek Modernization Except for Items Separately Priced, Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified. This item includes but is not necessarily limited to the following features of work:

a. Campsite Rehabilitation (both loops)

b. Revegetation and restoration plantings

c. Traffic Signage

d. Water System improvements and additions (Base-bid area only)

e. Electrical System improvements and additions (Base-bid area only)

f. Irrigation System (Includes design of entire system, installation of pipe sleeves under all roads and trails, and installation of the irrigation system within the Base-bid area as indicated.

g. Trails (paved and unpaved within the Base-bid area or as noted.)

h. ADA Picnic Table pads/slabs (one required in Base-bid area – all others in Options 9, 10, and 14)

i. Turf Renovation (Includes topsoil placement, tillage, and permanent lawn seeding within the Base-bid area only.)

j. Asphalt Paving – Roads and Parking, Trails (except as stated or shown in Options 9, 10, and 14) including tree removals as noted on Drawing Sheet 3 and associated disposal and stockpiling for Government disposition. Additional tree removals are paid under Item 0003.

k. Boat Ramp Improvements and Expansion

l. Ramp to fishing pier (Detail 7 – Plate L1.5)

1.3.2 Item No. 0002 (BASE ITEM):

Payment will be made at the contract lump sum price for Item No. 0002, All work for Addition and Alterations to Building RC-2, Raven Loop Restroom, Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified.

1.3.3 Item 0003 - Selective Tree, Stump and Root Removal and Disposal

1.3.3.1 Payment

Payment will be made at the applicable contract unit prices under Item 0003 "Selective Tree, Stump and Root Removal and Disposal" under one of the subitems described hereinafter. Payment shall include the cost of all labor and equipment required for the item of work, complete. Selective tree removal will occur at campsite areas and trails and includes removal of trees and stumps identified on Sheet 13, Detail 1 "Typical Site Renovation Work."

1.3.3.1.1 Item 0003AA, 6-Inch to 12-Inch Diameter Tree, Including Stump and Roots

1.3.3.1.2 Item 0003AB, Over 12-inch to 18-Inch Diameter Tree, Including Stump and Roots

1.3.3.1.3 Item 0003AC, 6-Inch to 12 Inch Diameter Stump, Including Roots

1.3.3.1.4 Item 0003AD, Over 12-inch to 18-Inch Diameter Stump, Including Roots

1.3.3.2 Measurement

Unit is each (EA) tree. The size shall be determined by the average diameter of the trunk 24 inches above the ground line. The diameter shall be measured to the nearest full inch. Measurement will not include the tree removal work, as such, identified as part of a lump sum payment item.

1.3.4 ITEM 0004 (BASE ITEM)

Payment will be made at the contract lump sum price for Item No. 0004, All Work for As-Built Drawings; payment of which shall constitute full compensation, for costs associated with the specified item of work complete. No partial or total payment will be made for this item until the as-built drawings, both marked up blue prints and electronic files are fully approved by the Government (A or B action) and all copies of approved drawings and electronic media received by the Government. This item is inclusive of all base and optional items that are awarded.

1.3.5 ITEM 0005 (BASE ITEM)

Payment will be made at the contract lump sum price for Item No. 0005, All Work for O&M Manuals; payment of which shall constitute full compensation, for costs associated with specified item of work, complete. No partial or total payment will be made for this item until all O&M manuals are fully approved by the Government (A or B action) and all copies of final manuals are received by the Government in their final binders. This item is inclusive of all base and optional items that are awarded.

1.3.6 Item No. 0006 (OPTIONAL ITEM):

Payment will be made at the contract lump sum price for Item No. 0006, All work for Addition and Alterations to Building RC-1 Nighthawk Loop Restroom, Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified.

1.3.7 Item No. 0007 (OPTIONAL ITEM):

Payment will be made at the contract lump sum price for Item No. 0007, All work for Alterations to RC-4 Beach Restroom, Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified. Include under this item all costs for providing the 300 gallon propane tank and associated concrete pad, screening fence and pipe connections to RC-4 for gas water heater unit WH-1.

1.3.8 Item No. 0008 (OPTIONAL ITEM):

Payment will be made at the contract lump sum price for Item No. 0008, All work for Alterations to Building RC-3 Picnic Area Restroom, Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified.

1.3.9 Item No. 0009 (OPTIONAL ITEM):

Payment will be made at the contract lump sum price for Item No. 0009, “Athletic and Recreational Improvements” in Work Area “A”, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified. This item includes but is not necessarily limited to the following features of work:

a. Multi-Sport Court.

b. Volleyball Court.

c. Playground Expansion

d. Concrete paver plaza and concrete curb at RC-3.

e. Associated picnic table pads (5 each).

f. Associated trails

g. Associated turf and irrigation system

h. Drinking fountain

i. Plantings (Trees)

See detail sheet for Work Area A at end of this section.

1.3.10 Item No. 0010 (OPTIONAL ITEM):

Payment will be made at the contract lump sum price for Item No. 0010, All work for Building RC-5 Picnic Shelter, Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified. This item includes demolition of old shelter, relocated barbecue grill, and new concrete pavers and concrete curb between RC-4 and RC-5 and at barbecue pad.

1.3.11 Item No. 0011 (OPTIONAL ITEM):

Payment will be made at the contract lump sum price for Item No. 0011, "Recreational Improvements" in Work Area "B", Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified. This item includes but is not necessarily limited to the following features of work:

a. Sand beach, and perimeter concrete curb and ADA beach access.

b. Retaining walls.

c. Associated trails

d. Associated turf and irrigation system.

e. Associated picnic table pads (4 each).

f. Steel piles (2 each).

g. Associated boat moorage area lighting

h. Grading of boat basin

See detail sheet for Work Area B at end of this section.

1.3.12 Item No. 0012 (OPTIONAL ITEM):

Payment will be made at the contract lump sum price for Item No. 0012, All work for Building RC-7 Gate House, Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified. Include under this item all costs for providing the associated site utilities including electrical, water and sewer to point of connection to existing service or to the nearest distribution line installed under the base bid. The work generally includes the sitework within the area identified as Work Area C on detail sheet at end of this section and the required connections to site utilities.

1.3.13 Item No. 0013 (OPTIONAL ITEM):

Payment will be made at the contract lump sum price for Item No. 0013, All work for Building RC-6 Storage Building, Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified. Include under this item all costs for providing the underground electrical service to point of connection to panel at Gate House.

1.3.14 Item No. 0014 (OPTIONAL ITEM):

Payment will be made at the contract lump sum price for Item No. 0014, All work for Alterations to Amphitheater, Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified. This work includes relocation of all existing items specified for reuse.

1.3.15 Item No. 0015 (OPTIONAL ITEM):

Payment will be made at the contract lump sum price for Item No. 0015, All work for “Dog Island” Improvements, Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified. This item includes but is not necessarily limited to the following features of work associated with the island:

a. Bridge to island

b. Trails

c. ADA Picnic Table Pads (5 each)

d. Turf Renovation

e. Irrigation system

This item does not include the new fishing pier. Include cost of pier under Item 0016.

1.3.16 Item No. 0016 (OPTIONAL ITEM):

Payment will be made at the contract lump sum price for Item No. 0016, All work for Piers and Pier Extension, Complete, payment of which shall constitute full compensation for costs associated with the item of work as shown on the drawings and as specified. This item includes but is not necessarily limited to the following features of work:

a. New fishing piers (one off of Dog Island and one near amphitheater)

b. New courtesy pier at new boat launch lane.

c. Pier extension at pumphouse

This item does not include the cost for any piles specifically stated as included in another item.

1.4 PAYMENT INVOICE

1.4.1 Progress Payment Invoice

Requests for payment shall be submitted in accordance with Federal Acquisition Regulations (FAR) Subpart 32.9, entitled "PROMPT PAYMENT", and Paragraphs 52.232-5 and 52.232-27, entitled "Payments Under Fixed-Price Construction Contracts", and "Prompt Payment for Construction Contracts", respectively. In addition each request shall be submitted in the number of copies and to the designated billing office as shown in the Contract.

1.4.1.1 When submitting payment requests, the Contractor shall complete Blocks 1 through 12 of the "PROGRESS PAYMENT INVOICE" Form as directed by the Contracting Officer. (A sample form is attached at the end of this Technical Specification Section.) The completed form shall then become the cover document to which all other support data shall be attached.

1.4.1.2 One additional copy of the entire request for payment, to include the "PROGRESS PAYMENT INVOICE" cover document, shall be forwarded to a separate address as designated by the Contracting Officer.

1.4.1.3 The Contractor shall submit with each pay request, a list of subcontractors that have worked during that pay period. The listing shall be broken down into weeks, identifying each subcontractor that has worked during a particular week, and indicate the total number of employees that have worked on site for each subcontractor for each week. The prime Contractor shall also indicate the total number of employees for its on-site staff for each week.

PARTS 2 and 3 NOT USED

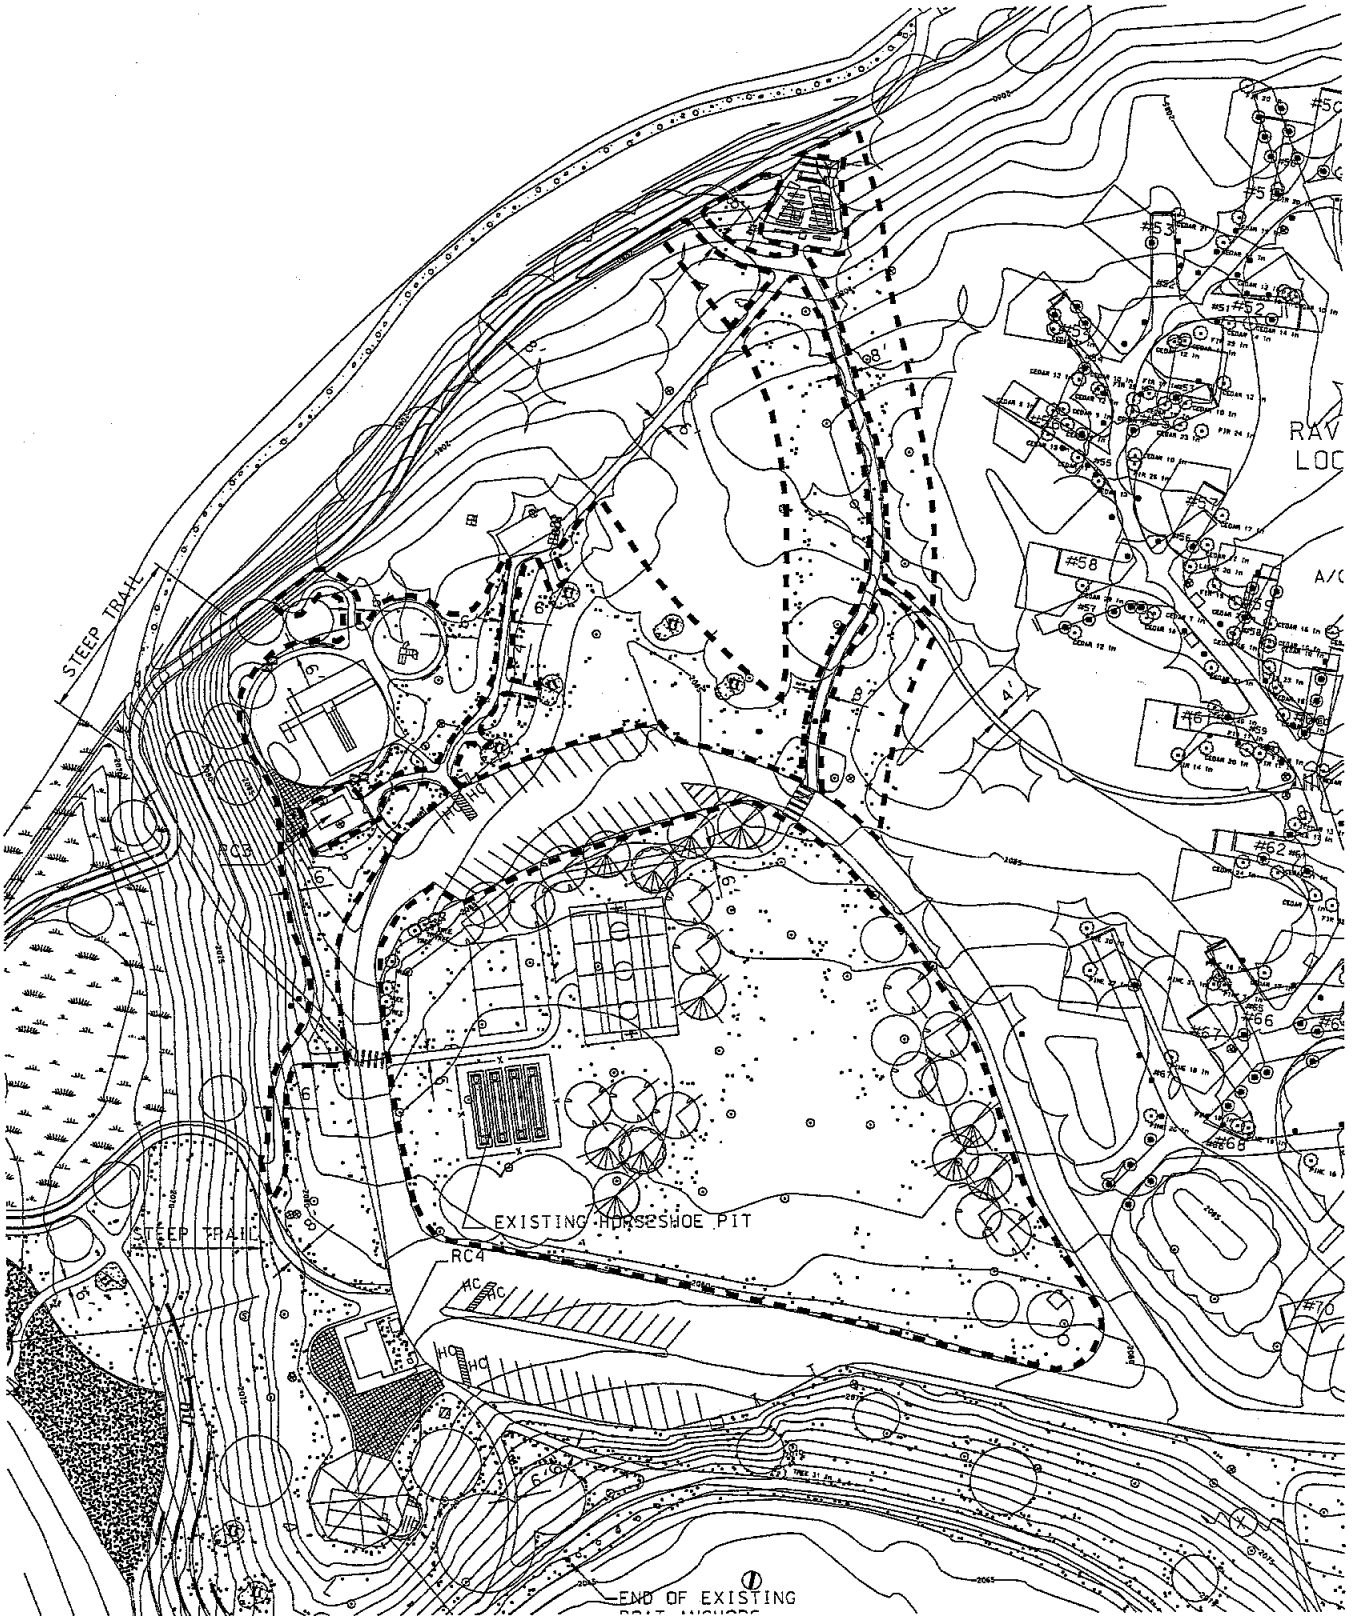

DACW67-03-B-0011

KEY OPTIONAL WORK AREA LIMITS - - - - - - 01270-7	DATE: 25APR03 N NOT TO SCALE	U. S. ARMY ENGINEER DISTRICT, SEATTLE CORPS OF ENGINEERS SEATTLE, WASHINGTON RILEY CREEK MODERNIZATION OPTIONAL WORK AREA 'A' ALBENI FALLS DAM IDAHO

DESIGN FILE: V:/civil/Albeni Falls Dam, ID/Riley Creek Modernization/Design/Asdesign/Drawings/Mstn/optA.dgn

This page intentionally blank

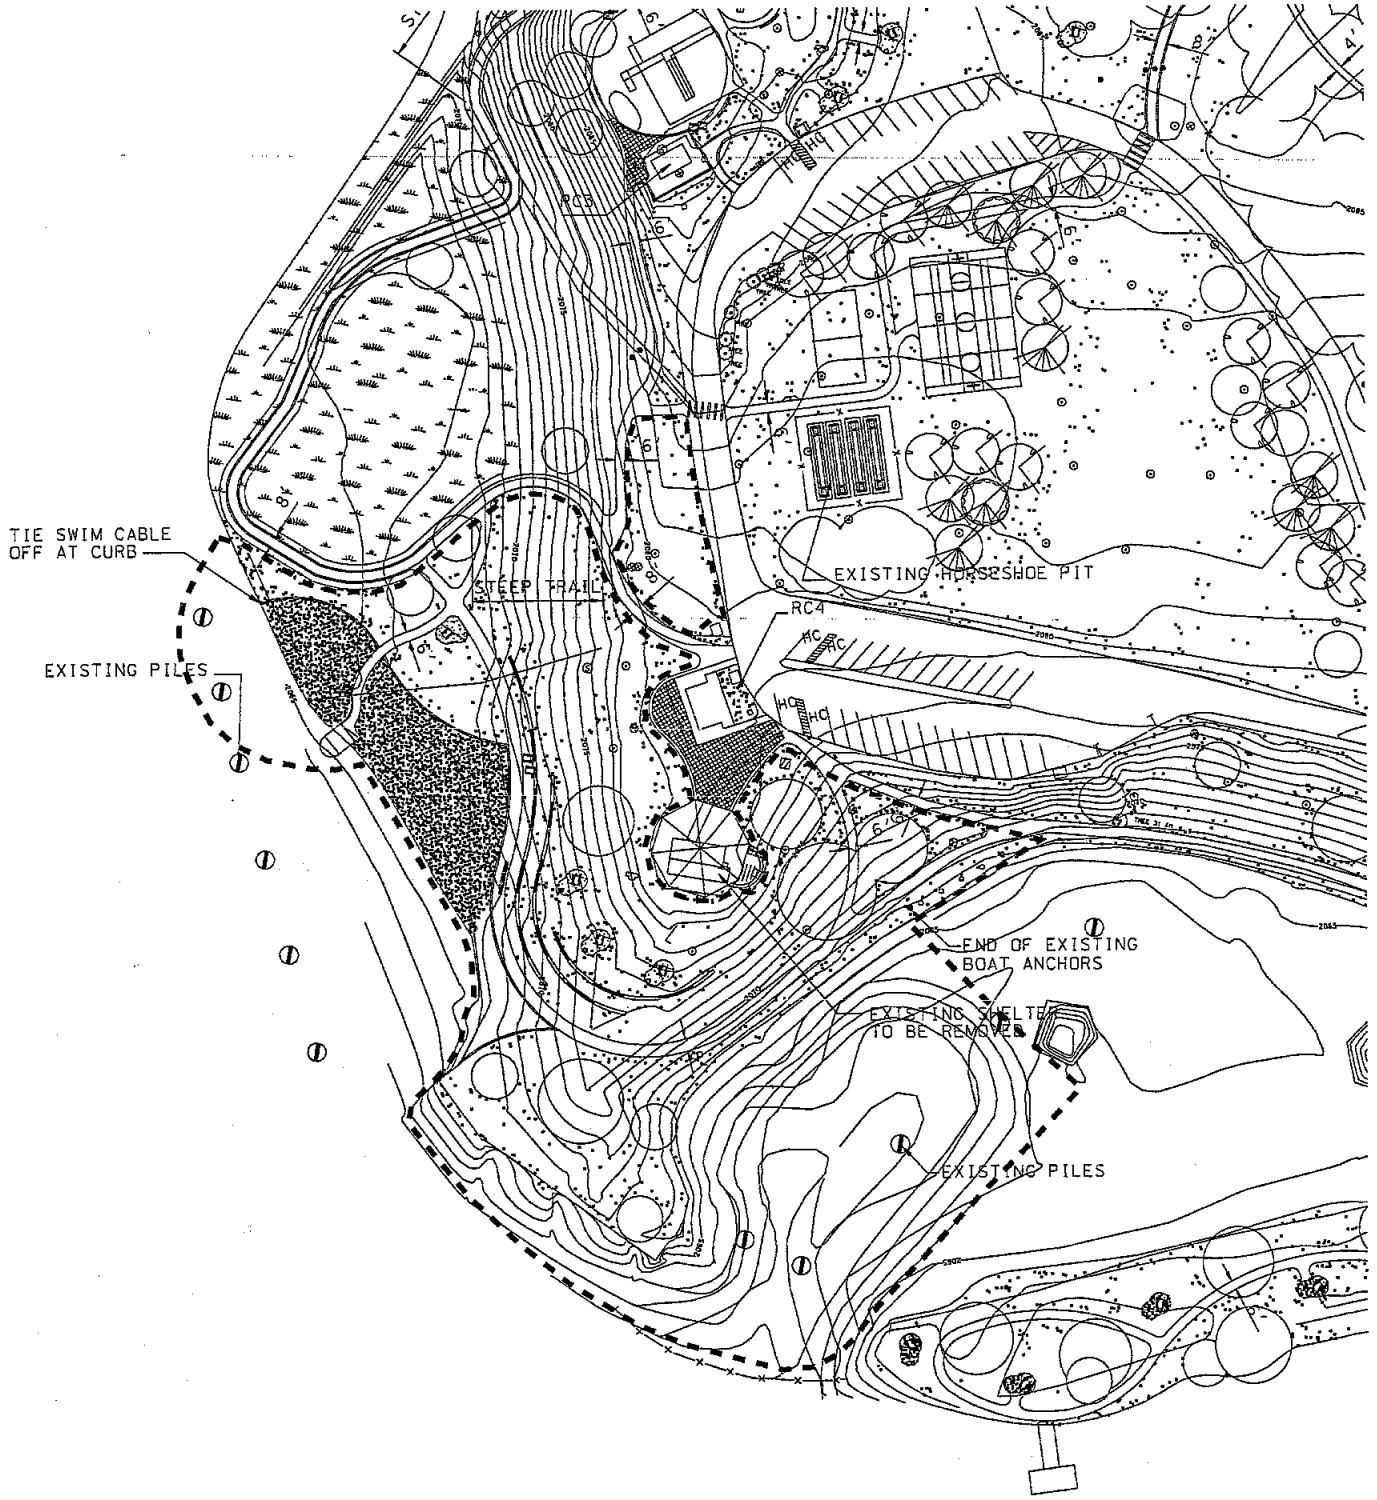

DACW67-03-B-0011

KEY OPTIONAL WORK AREA LIMITS - - - - - - 01270-8	DATE: 25APR03 N NOT TO SCALE	U. S. ARMY ENGINEER DISTRICT, SEATTLE CORPS OF ENGINEERS SEATTLE, WASHINGTON RILEY CREEK MODERNIZATION OPTIONAL WORK AREA 'B' ALBENI FALLS DAM IDAHO

DESIGN FILE: V:/civil/Albeni Falls Dam, ID/Riley Creek Modernization/Design/Asdesign/Drawings/Mstn/optB.dgn

This page intentionally blank

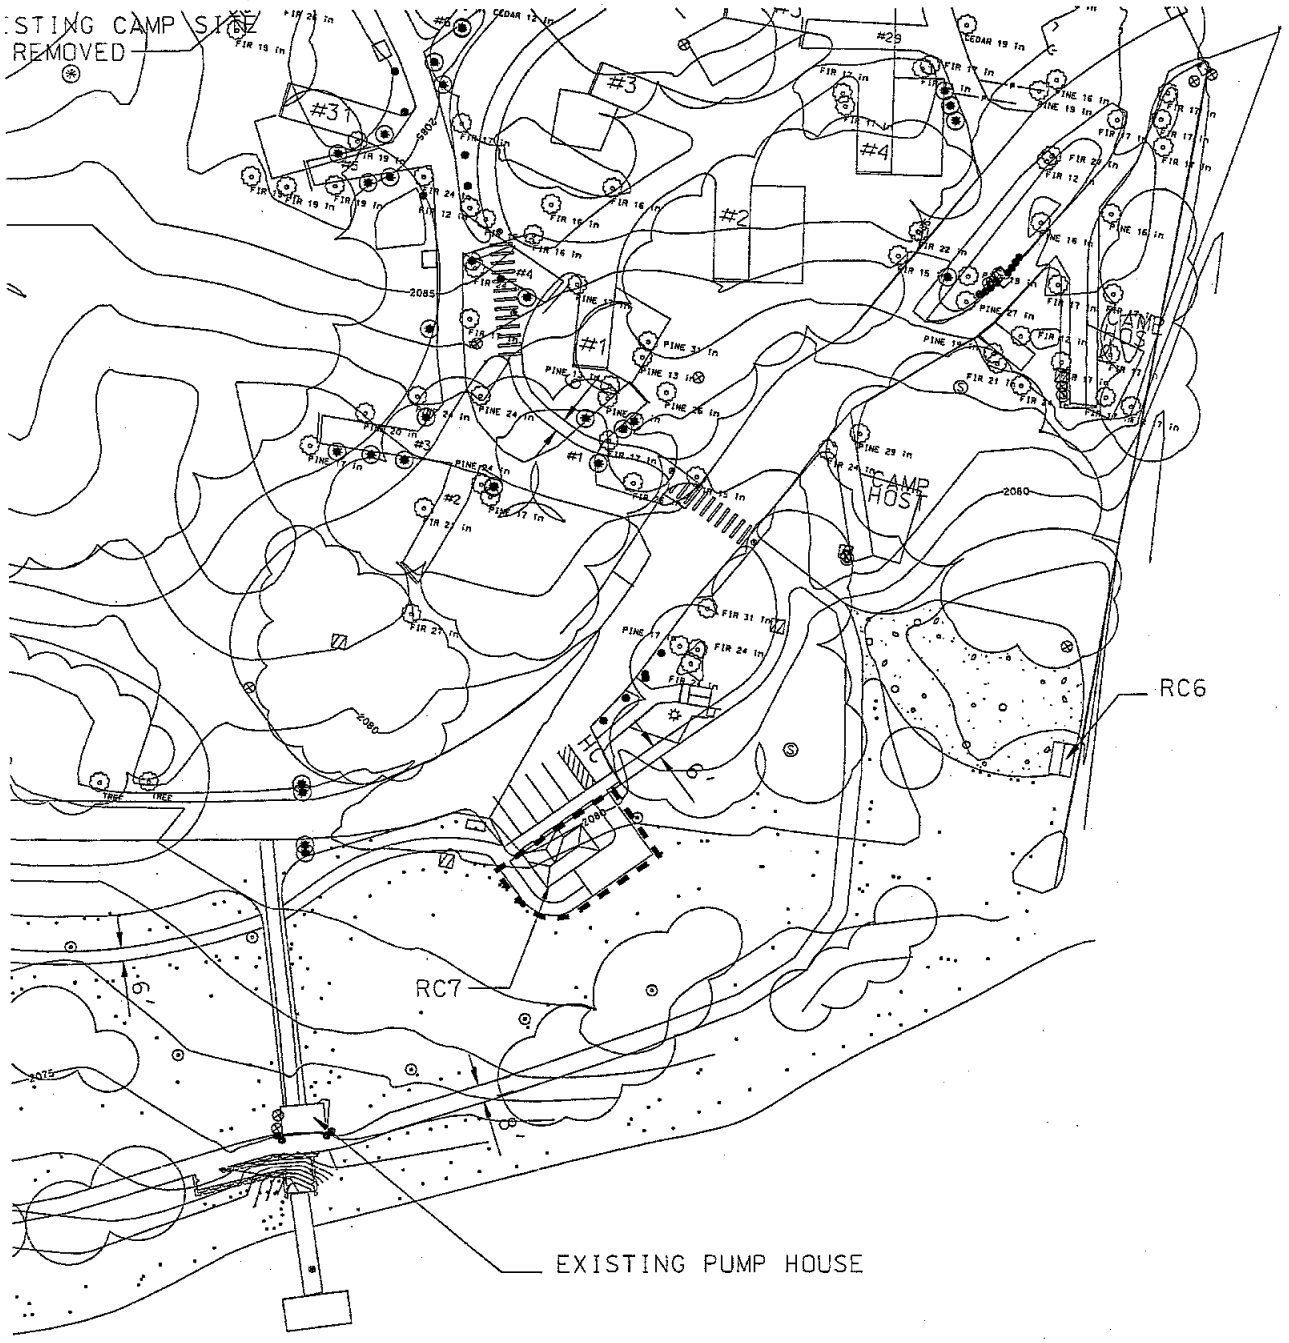

DACW67-03-B-0011

KEY OPTIONAL WORK AREA LIMITS - - - - - - 01270-9	DATE: 25APR03 N NOT TO SCALE	U. S. ARMY ENGINEER DISTRICT, SEATTLE CORPS OF ENGINEERS SEATTLE, WASHINGTON RILEY CREEK MODERNIZATION OPTIONAL WORK AREA 'C' ALBENI FALLS DAM IDAHO

DESIGN FILE: V:/civil/Albeni Falls Dam, ID/Riley Creek Modernization/Design/Asdesign/Drawings/Mstn/opt8.dgn

This page intentionally blank

PROGRESS PAYMENT INVOICE

See Federal Acquisition Regulations (FAR) 32.900, 52.232-5, & 52.232-27

1. PROJECT AND LOCATION	2. DATE
3. CONTRACTOR NAME AND ADDRESS (Must be the same as in the Contract)	4. CONTRACT NO. _____ 5. INVOICE NO.
6. DESCRIPTION OF WORK	7. PERIOD OF PERFORMANCE From: To:
8. DISCOUNT TERMS	
9. OFFICIAL TO WHOM PAYMENT IS TO BE FORWARDED Name: Title: Phone: ( ) -	10. OFFICIAL TO BE NOTIFIED OF DEFECTIVE INVOICE Name: Title: Phone ( ) -

11. CERTIFICATION: I hereby certify, to the best of my knowledge and belief, that

(1) The amounts requested are only for the performance in accordance with the specifications, terms, and conditions of this contract;

(2) Payments to subcontractors and suppliers have been made from previous payments received under the contract, and timely payments will be made from the proceeds of the payment covered by this certification, in accordance with subcontract agreements and the requirements of Chapter 39 of Title 31, United States Code; and

(3) This request for progress payment does not include any amounts which the prime contractor intends to withhold or retain from a subcontractor or supplier in accordance with the terms and conditions of the subcontract.

_____ _____ _____

(Signature) **(Title)** **(Date)**

12. OTHER INFORMATION OR DOCUMENTATION required by Contract. Provide two (2) copies of each (check and attach if applicable): _____ Updated Progress Chart/Schedule _____ Progress Narrative _____ Certified Payrolls (submitted weekly) _____ Safety Exposure Report _____ Updated Submittal \register _____ Progress Photos _____ Subcontractor/Employee Listings	(FOR GOVERNMENT USE ONLY) Retainage: _____% Amt: $_____ Withholdings: $ _____ Reason: _____ _____ Following items are current: As-Builts _____ Yes _____ No O & M Manuals _____ Yes _____ No 1354 Data _____ Yes _____ No Submittal Register _____Yes _____No

This page intentionally blank

SECTION 10800

TOILET ACCESSORIES

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 1036	(1991) Flat Glass

COMMERCIAL ITEM DESCRIPTIONS (CID)

CID A-A-2380	(Rev A) Dispenser, Paper Towel
CID A-A-2398	(Rev B) Curtain, Shower and Window (Metric - SI)

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-01 Data

Finishes; G. Accessory Items; G.

Manufacturer's descriptive data and catalog cuts indicating materials of construction, fasteners proposed for use for each type of wall construction, mounting instructions, operation instructions, and cleaning instructions.

SD-14 Samples

Finishes; G. Accessory Items; G.

One sample of each accessory proposed for use. Approved samples may be incorporated into the finished work, provided they are identified and their locations noted.

1.3 DELIVERY, STORAGE, AND HANDLING

Toilet accessories shall be wrapped for shipment and storage, delivered to the job site in manufacturer's original packaging, and stored in a clean, dry area protected from construction damage and vandalism.

1.4 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

PART 2 PRODUCTS

2.1 MANUFACTURED UNITS

Toilet accessories shall be provided where indicated in accordance with the drawings. Porcelain type, tile-wall accessories are specified in Section 09310 CERAMIC TILE. Each accessory item shall be complete with the necessary mounting plates and shall be of sturdy construction with corrosion resistant surface.

2.1.1 Anchors and Fasteners

Anchors and fasteners shall be capable of developing a restraining force commensurate with the strength of the accessory to be mounted and shall be suited for use with the supporting construction. Exposed fasteners shall be of tamperproof design and shall be finished to match the accessory.

2.1.2 Finishes

Except where noted otherwise, finishes on metal shall be provided as follows:

Metal	Finish
Stainless steel	No. 4 satin finish
Carbon steel, copper alloy, and brass	Chromium plated, bright

2.2 ACCESSORY ITEMS

Accessory items shall conform to the requirements specified below.

2.2.1 Grab Bar (GB)

Bobrick, B-5806, or equal. Grab bar shall be 18 gauge, 1-1/4 inches OD Type 304 stainless steel. Grab bar shall be form and length as indicated. Exposed mounting flange shall have mounting holes concealed. Grab bar shall have peened non-slip surface. Installed bars shall be capable of withstanding a 500 pound vertical load without coming loose from the fastenings and without obvious permanent deformation. Space between wall and grab bar shall be 1-1/2 inch.

2.2.2 Mirrors, Glass (MG)

Bobrick, B-165, or equal. Glass for mirrors shall be Type I transparent flat type, Class 1-clear. Glazing Quality q1 1/4 inch thick conforming to ASTM C 1036. Glass shall be coated on one surface with silver coating, copper protective coating, and mirror backing paint. Silver coating shall be highly adhesive pure silver coating of a thickness which shall provide reflectivity of 83 percent or more of incident light when viewed through 1/4

inch thick glass, and shall be free of pinholes or other defects. Copper protective coating shall be pure bright reflective copper, homogeneous without sludge, pinholes or other defects, and shall be of proper thickness to prevent "adhesion pull" by mirror backing paint. Mirror backing paint shall consist of two coats of special scratch and abrasion-resistant paint and shall be baked in uniform thickness to provide a protection for silver and copper coatings which will permit normal cutting and edge fabrication.

2.2.3 Mirror, Metal (MM)

Bobrick, B1556, or equal. Metal mirror shall be bright polished stainless steel, mirror quality, 0.037 inch minimum thickness, edges turned back 1/4 inch and recess fitted with tempered hardboard backing, and theft-proof fasteners. Size shall be in accordance with the drawings.

2.2.4 Paper Towel Dispenser (PTD)

Bobrick, B-262, or equal. Paper towel dispenser shall conform to CID A-A-2380, Type I, shall be constructed of not less than 0.269 inch Type 304 stainless steel, and shall be surface mounted. Dispenser shall have a towel compartment. Locking mechanism shall be tumbler key lock.

2.2.5 Combination Paper Towel Dispenser/Waste Receptacle Units (PTDWR)

Bobrick, B-43949, or equal. Dispenser/receptacle shall be surface mounted and shall have a capacity of 600 sheets of C-fold, single-fold, or quarter-fold towel. Waste receptacle shall be designed to be locked in unit and removable for service. Locking mechanism shall be tumbler key lock. Waste receptacle shall have a capacity of 12 gallons. Unit shall be fabricated of not less than 0.30 inch stainless steel welded construction with all exposed surfaces having a satin finish. Waste receptacle that accepts reusable liner standard for unit manufacturer shall be provided.

2.2.6 Sanitary Napkin Disposer (SND)

Bobrick, B-254, or equal. Sanitary napkin disposal shall be constructed of Type 304 stainless steel with removable leak-proof receptacle for disposable liners. Fifty disposable liners of the type standard with the manufacturer shall be provided. Receptacle shall be retained in cabinet by tumbler lock. Disposer shall be provided with a door for inserting disposed napkins, and shall be partition mounted, double access.

2.2.7 Shower Curtain (SC)

Bobrick, 204-2 and 204-3, or equal. Shower curtain shall conform to CID A-A-2398, Style I, size to suit conditions. Curtain shall be anti-bacterial nylon/vinyl fabric. Color shall be as shown in Section 09915 COLOR SCHEDULE.

2.2.8 Shower Curtain Rods (SCR)

Bobrick, B207, or equal. Shower curtain rods shall be Type 304 stainless steel 1-inch OD by 0.049 inch minimum straight to meet installation conditions.

2.2.9 Soap Dispenser (SD)

Bobrick, B2111, or equal. Soap dispenser shall be surface mounted, liquid type consisting of a vertical Type 304 stainless steel tank with holding capacity of 40 fluid ounces with a corrosion-resistant all-purpose valve that dispenses liquid soaps, lotions, detergents and antiseptic soaps.

2.2.10 Toilet Tissue Dispenser (TTD)

Bobrick, B-2888, or equal. Toilet tissue holder shall be Type II - surface mounted with two rolls of standard tissue mounted horizontally. Cabinet shall be carbon steel, bright chromium plated finish.

2.2.11 Waste Receptacle (WR)

Bobric, B5277, or equal. Waste receptacle shall be Type 304 stainless steel, designed for surface mounting. Reuseable liner, of the type standard with the receptacle manufacturer, shall be provided. Capacity shall be not less than 2 cubic feet. Receptacles with push doors and doors for access to the waste compartment shall have continuous hinges.

PART 3 EXECUTION

3.1 INSTALLATION

Toilet accessories shall be securely fastened to the supporting construction in accordance with the manufacturer's approved instructions. Accessories shall be protected from damage from the time of installation until acceptance.

3.2 CLEANING

Material shall be cleaned in accordance with manufacturer's recommendations. Alkaline or abrasive agents shall not be used. Precautions shall be taken to avoid scratching or marring of surfaces.

3.3 SCHEDULE

Accessories Required

RC-1

Grab Bars - 4 in the new toilet room portion, (see 4/A1.1) 6 in the new shower room portion (2 if continuous), (see 4/A1.1).
Mirrors, Glass - 2
Paper Towel Dispenser - 2
Sanitary Napkin Disposer - 2
Shower Curtain - 2
Shower Curtain Rod - 2
Soap Dispenser - 2
Toilet Tissue Dispenser - 2
Waste Receptacle - 2
Hooks - 4
Combination Paper Towel Dispenser/Waste Receptacle Units - 2 (if used, replaces Paper Towel Dispenser (PTD) & Waste Receptacle (WR))
Note: All existing accessories removed during the renovation need to be re-attached.

RC-2

Grab Bars - 4 in the new toilet room portion, (see 4/A1.1) 6 in the new shower room portion (2 if continuous), (see 4/A1.1).
Mirrors, Glass - 2
Paper Towel Dispenser - 2
Sanitary Napkin Disposer - 2
Shower Curtain - 2
Shower Curtain Rod - 2
Soap Dispenser - 2
Toilet Tissue Dispenser - 2
Waste Receptacle - 2
Hooks - 4
Combination Paper Towel Dispenser/Waste Receptacle Units - 2 (if used, replaces Paper Towel Dispenser (PTD) & Waste Receptacle (WR))
Note: All existing accessories removed during the renovation need to be re-attached.

RC-3

Grab Bars - none
Mirrors, Glass - none
Paper Towel Dispenser - none
Sanitary Napkin Disposer - none
Shower Curtain - none
Shower Curtain Rod - none
Soap Dispenser - none
Toilet Tissue Dispenser - none
Waste Receptacle - none
Combination Paper Towel Dispenser/Waste Receptacle Units - none (if used, replaces Paper Towel Dispenser (PTD) & Waste Receptacle (WR))
Note: All existing accessories removed during the renovation need to be re-attached.

RC-4

Grab Bars - 4 in the shower (2 if continuous), see 6/A1.2
Mirrors, Glass - none
Paper Towel Dispenser - none
Sanitary Napkin Disposer - none
Shower Curtain - 2
Shower Curtain Rod - 2
Soap Dispenser - none
Toilet Tissue Dispenser - none
Waste Receptacle - none
Hooks - 4
Combination Paper Towel Dispenser/Waste Receptacle Units - 2 (if used, replaces Paper Towel Dispenser (PTD) & Waste Receptacle (WR))
Note: All existing accessories removed during the renovation need to be re-attached.

Gatehouse Bathroom

- Grab Bars - 2
- Mirrors, Glass - 1
- Paper Towel Dispenser - 1
- Sanitary Napkin Disposer - 1
- Shower Curtain - none
- Shower Curtain Rod - none
- Soap Dispenser - 1
- Toilet Tissue Dispenser - 1
- Waste Receptacle - 1
- Combination Paper Towel Dispenser/Waste Receptacle Units - 1 (if used, replaces Paper Towel Dispenser (PTD) & Waste Receptacle (WR))

END OF SECTION

SECTION 16415

ELECTRICAL WORK, INTERIOR

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI C78.1	(1991; C78.1a; R 1996) Fluorescent Lamps - Rapid-Start Types - Dimensional and Electrical Characteristics
ANSI C78.20	(1995) Electric Lamps - Characteristics of Incandescent Lamps A, G, PS, and Similar Shapes with E26 Medium Screw Bases
ANSI C78.21	(1995) Physical and Electrical Characteristics - Incandescent Lamps - PAR and R Shapes
ANSI C78.2A	(1991) 18 & 26- Watt, Compact Fluorescent Quad Tube Lamps
ANSI C78.2B	(1992) 9 & 13-Watt, Compact Fluorescent Quad Tube Lamps
ANSI C82.1	(1997) Specifications for Fluorescent Lamp Ballasts

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B 1	(1995) Hard-Drawn Copper Wire
ASTM B 8	(1999) Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
ASTM D 709	(1992; R 1997) Laminated Thermosetting Materials
ASTM D 4059	(1996) Analysis of Polychlorinated Biphenyls in Insulating Liquids by Gas Chromatography

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250	(1991) Enclosures for Electrical Equipment (1000 Volts Maximum)
NEMA AB 1	(1993) Molded Case Circuit Breakers and Molded Case Switches

NEMA FU 1	(1986) Low Voltage Cartridge Fuses
NEMA LE 4	(1987) Recessed Luminaires, Ceiling Compatibility
NEMA MG 1	(1993; Rev 1; Rev 2; Rev 3; Rev 4) Motors and Generators
NEMA MG 10	(1994) Energy Management Guide for Selection and Use of Polyphase Motors
NEMA OS 1	(1996) Sheet-Steel Outlet Boxes, Device Boxes, Covers, and Box Supports
NEMA OS 2	(1986; Errata Aug 1986; R 1991) Nonmetallic Outlet Boxes, Device Boxes, Covers and Box Supports
NEMA PB 1	(1995) Panelboards
NEMA TC 2	(1990) Electrical Polyvinyl Chloride (PVC) Tubing (EPT) and Conduit (EPC-40 and EPC-80)
NEMA WD 1	(1983; R 1989) General Requirements for Wiring Devices
NEMA WD 6	(1988) Wiring Devices - Dimensional Requirements

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(1999) National Electrical Code
NFPA 101	(1997; Errata 97-1; TIA 97-1) Life Safety Code

UNDERWRITERS LABORATORIES (UL)

UL 5	(1996) Surface Metal Raceways and Fittings
UL 6	(1997) Rigid Metal Conduit
UL 20	(1995; Rev thru Oct 1998) General-Use Snap Switches
UL 44	(1997; Rev Mar 1999) Thermoset-Insulated Wires and Cables
UL 50	(1995; Rev thru Oct 1997) Enclosures for Electrical Equipment
UL 67	(1993; Rev thru Nov 1995) Panelboards
UL 83	(1998) Thermoplastic-Insulated Wires and Cables
UL 198B	(1995) Class H Fuses

UL 198D	(1995) Class K Fuses
UL 198E	(1988; Rev Jul 1988) Class R Fuses
UL 198H	(1988; Rev thru Nov 1993) Class T Fuses
UL 360	(1996; Rev thru Oct 1997) Liquid-Tight Flexible Steel Conduit
UL 467	(1993; Rev thru Aug 1996) Grounding and Bonding Equipment
UL 486A	(1997; Rev thru Dec 1998) Wire Connectors and Soldering Lugs for Use with Copper Conductors
UL 486C	(1997; Rev thru Aug 1998) Splicing Wire Connectors
UL 486E	(1994; Rev thru Feb 1997) Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
UL 489	(1996; Rev thru Dec 1998) Molded-Case Circuit Breakers, Molded-Case Switches, and Circuit-Breaker Enclosures
UL 498	(1996; Rev thru Sep 1998) Attachment Plugs and Receptacles
UL 510	(1994; Rev thru Apr 1998) Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape
UL 512	(1993; R Dec 1995) Fuseholders
UL 514A	(1996; Rev Jul 1998) Metallic Outlet Boxes
UL 514B	(1997; Rev Oct 1998) Fittings for Cable and Conduit
UL 514C	(1996; R Sep 1998) Nonmetallic Outlet Boxes, Flush-Device Boxes, and Covers
UL 542	(1994; Rev thru Jul 1998) Lampholders, Starters, and Starter Holders for Fluorescent Lamps
UL 651	(1995; Rev thru Oct 1998) Schedule 40 and 80 Rigid PVC Conduit
UL 651A	(1995; Rev thru Apr 1998) Type EB and A Rigid PVC Conduit and HDPE Conduit
UL 797	(1993; Rev thru Mar 1997) Electrical Metallic Tubing

UL 817	(1994; Rev thru Jul 1998) Cord Sets and Power-Supply Cords
UL 869A	(1998) Reference Standard for Service Equipment
UL 924	(1995; Rev thru Oct 97) Emergency Lighting and Power Equipment
UL 935	(1995; Rev thru Oct 1998)Fluorescent-Lamp Ballasts
UL 943	(1993; Rev thru May 1998)Ground-Fault Circuit-Interrupters
UL 1004	(1994; Rev thru Dec 1997) Electric Motors
UL 1010	(1995; Rev thru Dec 1996)Receptacle-Plug Combinations for Use in Hazardous (Classified) Locations
UL 1242	(1996; Rev Mar 1998) Intermediate Metal Conduit
UL 1570	(1995; Rev thru Jun 1997) Fluorescent Lighting Fixtures
UL 1571	(1995; Rev thru Jun 1997) Incandescent Lighting Fixtures
UL 1660	(1994; Rev Apr 1998) Liquid-Tight Flexible Nonmetallic Conduit
UL Elec Const Dir	(1998) Electrical Construction Equipment Directory

1.2 GENERAL

1.2.1 Rules

The installation shall conform to the requirements of NFPA 70 and NFPA 101, unless more stringent requirements are indicated or shown.

1.2.2 Coordination

The drawings indicate the extent and the general location and arrangement of equipment, conduit, and wiring. The Contractor shall become familiar with all details of the work and verify all dimensions in the field so that the outlets and equipment shall be properly located and readily accessible. Lighting fixtures, outlets, and other equipment and materials shall be carefully coordinated with mechanical or structural features prior to installation and positioned according to architectural reflected ceiling plans; otherwise, lighting fixtures shall be symmetrically located according to the room arrangement when uniform illumination is required, or asymmetrically located to suit conditions fixed by design and shown. Raceways, junction and outlet boxes, and lighting fixtures shall not be supported from sheet metal roof decks. If any conflicts occur necessitating

departures from the drawings, details of and reasons for departures shall be submitted and approved prior to implementing any change. The Contractor shall coordinate the electrical requirements of the mechanical work and provide all power related circuits, wiring, hardware and structural support, even if not shown on the drawings.

1.2.3 Special Environments

1.2.3.1 Weatherproof Locations

Wiring, Fixtures, and equipment in designated locations shall conform to NFPA 70 requirements for installation in damp or wet locations.

1.2.4 Standard Products

Material and equipment shall be a standard product of a manufacturer regularly engaged in the manufacture of the product and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening.

1.2.5 Nameplates

1.2.5.1 Identification Nameplates

Major items of electrical equipment and major components shall be permanently marked with an identification name to identify the equipment by type or function and specific unit number as indicated. Designation of motors shall coincide with their designation in the motor control center or panel. Unless otherwise specified, identification nameplates shall be made of laminated plastic in accordance with ASTM D 709 with black outer layers and a white core. Edges shall be chamfered. Plates shall be fastened with black-finished round-head drive screws, except motors, or approved nonadhesive metal fasteners. When the nameplate is to be installed on an irregular-shaped object, the Contractor shall devise an approved support suitable for the application and ensure the proper installation of the supports and nameplates. In all instances, the nameplate shall be installed in a conspicuous location. At the option of the Contractor, the equipment manufacturer's standard embossed nameplate material with black paint-filled letters may be furnished in lieu of laminated plastic. The front of each panelboard shall have a nameplate to indicate the phase letter, corresponding color and arrangement of the phase conductors. The following equipment, as a minimum, shall be provided with identification nameplates:

Minimum 1/4 inch
High Letters

Panelboards
Transformers
Motors

Each panel provided with a nameplate in addition to nameplates listed above, which shall be provided for individual compartments in the respective assembly, including nameplates which identify "future," "spare," and "spaces."

1.2.6 As-Built Drawings

Following the project completion or turnover, within 30 days the Contractor shall furnish 2 sets of as-built drawings to the Contracting Officer.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-01 Data

Manufacturer's Catalog; G.

Data composed of catalog cuts, brochures, circulars, specifications, product data, and printed information in sufficient detail and scope to verify compliance with the requirements of the contract documents.

Material, Equipment, and Fixture Lists.

A complete itemized listing of equipment and materials proposed for incorporation into the work. Each entry shall include an item number, the quantity of items proposed, and the name of the manufacturer of each item.

Installation Procedures; G.

Installation procedures for rotating equipment and transformers. Procedures shall include diagrams, instructions, and precautions required to install, adjust, calibrate, and test devices and equipment.

SD-04 Drawings

Interior Electrical Equipment; G.

Detail drawings consisting of equipment drawings, illustrations, schedules, instructions, diagrams, and other information necessary to define the installation. Detail drawings shall show the rating of items and systems and how the components of an item and system are assembled, function together, and how they will be installed on the project. Data and drawings for component parts of an item or system shall be coordinated and submitted as a unit. Data and drawings shall be coordinated and included in a single submission. Multiple submissions for the same equipment or system are not acceptable except where prior approval has been obtained from the Contracting Officer. In such cases, a list of data to be submitted later shall be included with the first submission. Detail drawings shall show physical arrangement, construction details, connections, finishes, materials used in fabrication, provisions for conduit entrance, access requirements for installation and maintenance, physical size, electrical characteristics, foundation and support details, and equipment weight. Drawings shall be drawn to scale and/or dimensioned. Optional items shall be clearly identified as included or excluded. Detail drawings shall as a minimum include:

a. Motors and rotating machinery.

b. Sway bracing for suspended luminaires.

Structural drawings showing the structural or physical features of major equipment items, components, assemblies, and structures, including foundations or other types of supports for equipment and conductors. These drawings shall include accurately scaled or dimensioned outline and arrangement or layout drawings to show the physical size of equipment and components and the relative arrangement and physical connection of related components. Weights of equipment, components and assemblies shall be provided when required to verify the adequacy of design and proposed construction of foundations or other types of supports. Dynamic forces shall be stated for switching devices when such forces must be considered in the design of support structures. The appropriate detail drawings shall show the provisions for leveling, anchoring, and connecting all items during installation, and shall include any recommendations made by the manufacturer.

Electrical drawings including single-line and three-line diagrams, and schematics or elementary diagrams of each electrical system; internal wiring and field connection diagrams of each electrical device when published by the manufacturer; wiring diagrams of cabinets, panels, units, or separate mountings; interconnection diagrams that show the wiring between separate components of assemblies; field connection diagrams that show the termination of wiring routed between separate items of equipment; internal wiring diagrams of equipment showing wiring as actually provided for this project. Field wiring connections shall be clearly identified.

If departures from the contract drawings are deemed necessary by the Contractor, complete details of such departures, including changes in related portions of the project and the reasons why, shall be submitted with the detail drawings. Approved departures shall be made at no additional cost to the Government.

As-Built Drawings; G.

The as-built drawings shall be a record of the construction as installed. The drawings shall include all the information shown on the contract drawings, deviations, modifications, and changes from the contract drawings, however minor. The as-built drawings shall be kept at the job site and updated daily. The as-built drawings shall be a full-sized set of prints marked to reflect all deviations, changes, and modifications. The as-built drawings shall be complete and show the location, size, dimensions, part identification, and other information. Additional sheets may be added. The as-built drawings shall be jointly inspected for accuracy and completeness by the Contractor's quality control representative and by the Contracting Officer prior to the submission of each monthly pay estimate. Upon completion of the work, the Contractor shall submit three full sized sets of the marked prints to the Contracting Officer for approval. If upon review, the as-built drawings are found to contain errors and/or omissions, they will be returned to the Contractor for correction. The Contractor shall correct and return the as-built drawings to the Contracting Officer for approval within ten calendar days from the time the drawings are returned to the Contractor.

SD-08 Statements

Onsite Test; G.

A detailed description of the Contractor's proposed procedures for on-site tests.

SD-09 Reports

Factory Test Reports; G.

Six copies of the information described below in 8 1/2 x 11 inch binders having a minimum of 5 rings from which material may readily be removed and replaced, including a separate section for each test. Sections shall be separated by heavy plastic dividers with tabs.

a. A list of equipment used, with calibration certifications.

b. A copy of measurements taken.

c. The dates of testing.

d. The equipment and values to be verified.

e. The conditions specified for the test.

f. The test results, signed and dated.

g. A description of adjustments made.

Field Test Plan; G.

A detailed description of the Contractor's proposed procedures for onsite test submitted 30 days prior to testing the installed system. No field test will be performed until the test plan is approved. The test plan shall consist of complete field test procedures including tests to be performed, test equipment required, and tolerance limits.

Field Test Reports; G.

Six copies of the information described below in 8 1/2 x 11 inch binders having a minimum of 5 rings from which material may readily be removed and replaced, including a separate section for each test. Sections shall be separated by heavy plastic dividers with tabs.

a. A list of equipment used, with calibration certifications.

b. A copy of measurements taken.

c. The dates of testing.

d. The equipment and values to be verified.

e. The conditions specified for the test.

f. The test results, signed and dated.

g. A description of adjustments made.

h. Final position of controls and device settings.

SD-13 Certificates

Materials and Equipment; G.

The label or listing of the Underwriters Laboratories, Inc., will be accepted as evidence that the materials or equipment conform to the applicable standards of that agency. In lieu of this label or listing, a statement from a nationally recognized, adequately equipped testing agency indicating that the items have been tested in accordance with required procedures and that the materials and equipment comply with all contract requirements will be accepted. However, materials and equipment installed in hazardous locations must bear the UL label unless the data submitted from other testing agency is specifically approved in writing by the Contracting Officer. Items which are required to be listed and labeled in accordance with Underwriters Laboratories must be affixed with a UL label that states that it is UL listed. No exceptions or waivers will be granted to this requirement. Materials and equipment will be approved based on the manufacturer's published data.

For other than equipment and materials specified to conform to UL publications, a manufacturer's statement indicating complete compliance with the applicable standard of the American Society for Testing and Materials, National Electrical Manufacturers Association, or other commercial standard, is acceptable.

1.4 WORKMANSHIP

Materials and equipment shall be installed in accordance with NFPA 70, recommendations of the manufacturer, and as shown.

1.5 SEISMIC REQUIREMENTS

Seismic details shall conform to Sections 13080 SEISMIC PROTECTION FOR MISCELLANEOUS EQUIPMENT and 16070 SEISMIC PROTECTION FOR ELECTRICAL EQUIPMENT.

PART 2 PRODUCTS

Products shall conform to the respective publications and other requirements specified below. Materials and equipment not listed below shall be as specified elsewhere in this section. Items of the same classification shall be identical including equipment, assemblies, parts, and components.

2.1 CABLES AND WIRES

Conductors No. 8 AWG and larger diameter shall be stranded. Conductors No. 10 AWG and smaller diameter shall be solid, except that conductors for remote control, alarm, and signal circuits, classes 1, 2, and 3, shall be stranded unless specifically indicated otherwise. Conductor sizes and ampacities shown are based on copper, unless indicated otherwise. All conductors shall be copper.

2.1.1 Equipment Manufacturer Requirements

When manufacturer's equipment requires copper conductors at the terminations or requires copper conductors to be provided between components of equipment, provide copper conductors or splices, splice boxes, and other work required to meet manufacturer's requirements.

2.1.2 Aluminum Conductors

Aluminum conductors shall not be used.

2.1.3 Insulation

Unless indicated otherwise, or required by NFPA 70, power and lighting wires shall be 600-volt, Type THWN, THHN, or THW conforming to UL 83; remote-control and signal circuits shall be Type TW, THW or TF, conforming to UL 83. Where lighting fixtures require 90-degree Centigrade (C) conductors, provide only conductors with 90-degree C insulation or better.

2.1.4 Bonding Conductors

ASTM B 1, solid bare copper wire for sizes No. 8 AWG and smaller diameter; ASTM B 8, Class B, stranded bare copper wire for sizes No. 6 AWG and larger diameter.

2.2 CIRCUIT BREAKERS

2.2.1 MOLDED-CASE CIRCUIT BREAKERS

Molded-case circuit breakers shall conform to NEMA AB 1 and UL 489 and UL 877 for circuit breakers and circuit breaker enclosures located in hazardous (classified) locations. Circuit breakers may be installed in panelboards.

2.2.1.1 Construction

Circuit breakers shall be suitable for mounting and operating in any position. Lug shall be listed for aluminum and copper conductors, or copper conductors only, in accordance with UL 486E.~~Lug shall be listed for copper conductors only in accordance with UL 486E.~~ Single-pole circuit breakers shall be full module size with not more than one pole per module. Multi-pole circuit breakers shall be of the common-trip type having a single operating handle such that an overload or short circuit on any one pole will result in all poles opening simultaneously. Sizes of 100 amperes or less may consist of single-pole breakers permanently factory assembled into a multi-pole unit having an internal, mechanical, nontamperable common-trip mechanism and external handle ties. All circuit breakers shall have a quick-make, quick-break overcenter toggle-type mechanism, and the handle mechanism shall be trip-free to prevent holding the contacts closed against a short-circuit or sustained overload. All circuit breaker handles shall assume a position between "ON" and "OFF" when tripped automatically. All ratings shall be clearly visible.

2.2.1.2 Ratings

Voltage ratings shall be not less than the applicable circuit voltage. The interrupting rating of the circuit breakers shall be at least equal to the available short-circuit current at the line terminals of the circuit breaker

and correspond to the UL listed integrated short-circuit current rating specified for the panelboards and switchboards. Molded-case circuit breakers shall have nominal voltage ratings, maximum continuous-current ratings, and maximum short-circuit interrupting ratings in accordance with NEMA AB 1. Ratings shall be coordinated with system X/R ratio.

2.2.1.3 Cascade System Ratings

Circuit breakers used in series combinations shall be in accordance with UL 489. Equipment, such as switchboards and panelboards, which house series-connected circuit breakers shall be clearly marked accordingly. Series combinations shall be listed in the UL Recognized Component Directory under "Circuit Breakers-Series Connected."

2.2.2 HACR Circuit Breakers

Circuit breakers 60 amperes or below, 240 volts, 1-pole or 2-pole, intended to protect multi-motor and combination-load installations involved in heating, air conditioning, and refrigerating equipment shall be marked "Listed HACR Type."

2.2.3 Ground Fault Circuit Interrupters

UL 943. Breakers equipped with ground fault circuit interrupters shall have ground fault class, interrupting capacity, and voltage and current ratings as indicated.

2.3 CONDUIT AND TUBING

2.3.1 Electrical, Zinc-Coated Steel Metallic Tubing (EMT)

UL 797

2.3.2 Electrical Nonmetallic Tubing (ENT)

NEMA TC 13.

2.3.3 Electrical Plastic Tubing and Conduit

NEMA TC 2.

2.3.4 Flexible Conduit, Steel and Plastic

General-purpose type, UL 1; liquid tight, UL 360, and UL 1660.

2.3.5 Intermediate Metal Conduit

UL 1242.

2.3.6 PVC Coated Rigid Steel Conduit

NEMA RN 1.

2.3.7 Rigid Aluminum Conduit

ANSI C80.5 and UL 6.

2.3.8 Rigid Metal Conduit

UL 6.

2.3.9 Rigid Plastic Conduit

NEMA TC 2, UL 651 and UL 651A.

2.3.10 Surface Metal Electrical Raceways and Fittings

UL 5.

2.4 CONDUIT AND DEVICE BOXES AND FITTINGS

2.4.1 Boxes, Metallic Outlet

NEMA OS 1 and UL 514A.

2.4.2 Boxes, Nonmetallic, Outlet and Flush-Device Boxes and Covers

NEMA OS 2 and UL 514C.

2.4.3 Boxes, Outlet for Use in Hazardous (Classified) Locations

UL 886.

2.4.4 Boxes, Switch (Enclosed), Surface-Mounted

UL 98.

2.4.5 Fittings for Conduit and Outlet Boxes

UL 514B.

2.4.6 Fittings For Use in Hazardous (Classified) Locations

UL 886.

2.4.7 Fittings, PVC, for Use with Rigid PVC Conduit and Tubing

UL 514B.

2.5 CONDUIT COATINGS PLASTIC RESIN SYSTEM

NEMA RN 1, Type A-40.

2.6 CONNECTORS, WIRE PRESSURE

2.6.1 For Use With Copper Conductors

UL 486A.

2.6.2 For Use With Aluminum Conductors

UL 486B.

2.7 ELECTRICAL GROUNDING AND BONDING EQUIPMENT

UL 467.

2.7.1 Ground Bus

The ground bus shall be bare conductor or flat copper in one piece, if practicable.

2.8 ENCLOSURES

NEMA ICS 6 unless otherwise specified.

2.8.1 Cabinets and Boxes

Cabinets and boxes with volume greater than 100 cubic inches shall be in accordance with UL 50, hot-dip, zinc-coated, if sheet steel.

2.8.2 Circuit Breaker Enclosures

UL 489.

2.9 LIGHTING FIXTURES, LAMPS, BALLASTS, EMERGENCY EQUIPMENT, CONTROLS AND ACCESSORIES

The following specifications are supported and supplemented by information and details on the drawings. Additional fixtures, if shown, shall conform to this specification. Lighting equipment installed in classified hazardous locations shall conform to UL 844. Lamps, lamp holders, ballasts, transformers, electronic circuitry and other lighting system components shall be constructed according to industry standards. Equipment shall be tested and listed by a recognized independent testing laboratory for the expected installation conditions. Equipment shall conform to the standards listed below.

2.9.1 Lamps

Lamps shall be constructed to operate in the specified fixture, and shall function without derating life or output as listed in published data. Lamps shall meet the requirements of the Energy Policy Act of 1992.

a. Incandescent and tungsten halogen lamps shall be designed for 125 volt operation (except for low voltage lamps), shall be rated for minimum life of 2,000 hours, and shall have color temperature between 2,800 and 3,200 degrees Kelvin. Tungsten halogen lamps shall incorporate quartz capsule construction. Lamps shall comply with ANSI C78.20 and sections 238 and 270 of ANSI C78.21.

b. Fluorescent lamps shall have color temperature of 3,500 degrees Kelvin. They shall be designed to operate with the ballasts and circuitry of the fixtures in which they will be used. Fluorescent lamps, including spares, shall be manufactured by one manufacturer to provide for color and performance consistency. Fluorescent lamps shall comply with ANSI C78.1. Fluorescent tube lamp efficiencies shall meet or exceed the following requirements.

T8, 32 watts	(4' lamp)	2800 lumens
T12,34 watts	(4' lamp)	2800 lumens
T8,59 watts	(8' lamp)	5700 lumens
T12,60 watts	(8' lamp)	5600 lumens
T8/U,31-32 watts	(U-tube)	2600 lumens
T12/U,34 watts	(U-tube)	2700 lumens

(1) Linear fluorescent lamps, unless otherwise indicated, shall be 4 feet long 32 watt T8, 265 mA, with minimum CRI of 75. Lamps of other lengths or types shall be used only where specified or shown. Lamps shall deliver rated life when operated on rapid start ballasts.

(2) Small compact fluorescent lamps shall be twin, double, or triple tube configuration as shown with bi-pin or four-pin snap-in base and shall have minimum CRI of 85. They shall deliver rated life when operated on ballasts as shown. 9 and 13 watt double tube lamps shall comply with ANSI C78.2B. 18 and 26 watt double tube lamps shall comply with ANSI C78.2A. Minimum starting temperature shall be 32 degrees F for twin tube lamps and for double and triple twin tube lamps without internal starter; and 15 degrees F for double and triple twin tube lamps with internal starter.

(3) Long compact fluorescent lamps shall be 18, 27, 39, 40, 50, or 55 watt bi-axial type as shown with four-pin snap-in base; shall have minimum CRI of 85; and shall have a minimum starting temperature of 50 degrees F. They shall deliver rated life when operated on rapid start ballasts.

c. High intensity discharge lamps, including spares, shall be manufactured by one manufacturer in order to provide color and performance consistency. High intensity discharge lamps shall be designed to operate with the ballasts and circuitry of the fixtures in which they will be used and shall have wattage, shape and base as shown. High intensity discharge lamps, unless otherwise shown, shall have medium or mogul screw base and minimum starting temperature of -20 degrees F. Metal halide lamps, unless otherwise shown, shall have minimum CRI of 65; color temperature of 4,300 degrees Kelvin; shall be -BU configuration if used in base-up position; and shall be -H or high output configuration if used in horizontal position. Lamps shall comply with all applicable ANSI C78.1350, ANSI C78.1351, ANSI C78.1352, ANSI C78.1355, ANSI C78.1375, and ANSI C78.1376.

2.9.2 Ballasts and Transformers

Ballasts or transformers shall be designed to operate the designated lamps within their optimum specifications, without derating the lamps. Lamp and ballast combinations shall be certified as acceptable by the lamp manufacturer.

a. Low voltage incandescent transformers shall be Class II UL listed 120/12 volt or 120/24 volt step-down transformers as required for the lamps shown. Transformers shall be high power factor type and shall be rated for continuous operation under the specified load.

Transformers shall be encased or encased and potted, and mounted integrally within the lighting fixture unless otherwise shown.

b. Fluorescent ballasts shall comply with ANSI C82.1 and shall be mounted integrally within fluorescent fixture housing unless otherwise shown. Ballasts shall have maximum current crest factor of 1.7; high power factor; Class A sound rating; maximum operating case temperature of 77 degrees F above ambient; and shall be rated Class P. Unless otherwise indicated, the minimum number of ballasts shall be used to serve each individual fixture. A single ballast may be used to serve multiple fixtures if they are continuously mounted, identically controlled and factory manufactured for that installation with an integral wireway.

(1) Compact fluorescent ballasts shall comply with IEEE C62.41 Category A transient voltage variation requirements and shall be mounted integrally within compact fluorescent fixture housing unless otherwise shown. Ballasts shall have minimum ballast factor of 0.95; maximum current crest factor of 1.6; high power factor; maximum operating case temperature of 77 degrees F above ambient; shall be rated Class P; and shall have a sound rating of Class A. Ballasts shall meet FCC Class A specifications for EMI/RFI emissions. Ballasts shall operate from nominal line voltage of 120 volts at 60 Hz and maintain constant light output over a line voltage variation of ± 10%. Ballasts shall have an end-of-lamp-life detection and shut-down circuit. Ballasts shall be UL listed and shall contain no PCBs. Ballasts shall contain potting to secure PC board, provide lead strain relief, and provide a moisture barrier.

(2) Electronic fluorescent ballasts shall comply with 47 CFR 18 for electromagnetic interference. Ballasts shall withstand line transients per IEEE C62.41, Category A. Ballasts shall have total harmonic distortion between 10 and 20%; minimum frequency of 20,000Hz; filament voltage between 2.5 and 4.5 volts; maximum starting inrush current of 20 amperes; and shall comply with the minimum Ballast Efficacy Factors shown in the table below. Minimum starting temperature shall be 50 degrees F. Ballasts shall carry a manufacturer's full warranty of three years, including a minimum $10 labor allowance per ballast.

ELECTRONIC FLUORESCENT BALLAST EFFICACY FACTORS

LAMP TYPE	TYPE OF STARTER & LAMP	NOMINAL OPERATIONAL VOLTAGE	NUMBER OF LAMPS	MINIMUM BALLAST EFFICACY FACTOR
32W T8	rapid start linear & U-tubes	120 V	1	2.54
			2	1.44
			3	0.93
			4	0.73
34W T12	rapid start linear & U-tubes	120 V	1	2.64
			2	1.41
			3	0.93

59W T8	rapid start linear	120 V	2	0.80
60W T12	rapid start linear	120 V	2	0.80

(3) Magnetic fluorescent ballasts shall be energy-saving, automatic resetting type, approved for the application by the Certified Ballast Manufacturers and complying with ANSI C82.1 and UL 935. Minimum ballast starting temperature shall be 40 degrees F for normal service and 0 degrees F where cold temperature service is required. Magnetic fluorescent ballasts shall have a ballast factor not less than shown in the following table:

MAGNETIC FLUORESCENT BALLAST FACTORS*

Design starting temperature above 40 degrees F with 60 Hz input frequency

LAMP TYPE	NUMBER OF LAMPS	NOMINAL OPERATIONAL INPUT VOLTAGE	TYPE OF STARTER & LAMP	MIN. BALLAST FACTOR
25W F25T8	1	120v	rapid start	.96
	2	120v		.95
32W F32T8	1	120v	rapid start	.96
	2	120v		.85
96W F96T8	1	120 v	instant start	1.10
	2			.85

* For ballasts not specifically designed for use with dimming controls.

2.9.3 Fixtures

Fixtures shall be in accordance with the size, shape, appearance, finish, and performance shown. Unless otherwise indicated, lighting fixtures shall be provided with housings, junction boxes, wiring, lampholders, mounting supports, trim, hardware and accessories for a complete and operable installation. Recessed housings shall be minimum 20 gauge cold rolled or galvanized steel as shown. Extruded aluminum fixtures shall have minimum wall thickness of 0.125 inches. Plastic lenses shall be 100% virgin acrylic or as shown. Glass lenses shall be tempered. Heat resistant glass shall be borosilicate type. Conoid recessed reflector cones shall be Alzak with clear specular low iridescent finish.

a. Fluorescent fixtures shall comply with UL 1570. Recessed ceiling fixtures shall comply with NEMA LE 4. Fixtures shall be plainly marked for proper lamp and ballast type to identify lamp diameter, wattage, color and start type. Marking shall be readily visible to service personnel, but not visible from normal viewing angles. Fluorescent fixture lens frames on recessed and surface mounted

troffers shall be one assembly with mitered corners. Parabolic louvers shall have a low iridescent finish and 45 degree cut-off. Louver intersection joints shall be hairline type and shall conceal mounting tabs or other assembly methods. Louvers shall be free from blemishes, lines or defects which distort the visual surface. Integral ballast and wireway compartments shall be easily accessible without the use of special tools. Housings shall be constructed to include grounding necessary to start the lamps. Open fixtures shall be equipped with a sleeve, wire guard, or other positive means to prevent lamps from falling. Medium bi-pin lampholders shall be twist-in type with positive locking position. Long compact fluorescent fixtures and fixtures utilizing U-bend lamps shall have clamps or secondary lampholders to support the free ends of the lamps.

b. Emergency lighting fixtures and accessories shall be constructed and independently tested to meet the requirements of applicable codes. Batteries shall be Nicad or equal with no required maintenance, and shall have a minimum life expectancy of five years and warranty period of three years.

c. Exit Signs

Exit signs shall be ENERGY STAR compliant, thereby meeting the following requirements. Input power shall be less than 5 watts per face. Letter size and spacing shall adhere to NFPA 101. Luminance contrast shall be greater than 0.8. Average luminance shall be greater than 15 cd/m^2 measured at normal (0 degree) and 45 degree viewing angles. Minimum luminance shall be greater than 8.6 cd/m^2 measured at normal and 45 degree viewing angles. Maximum to minimum luminance shall be less than 20:1 measured at normal and 45 degree viewing angles. The manufacturer warranty for defective parts shall be at least 5 years.

2.9.4 Lampholders, Starters, and Starter Holders

UL 542

2.10 LOW-VOLTAGE FUSES AND FUSEHOLDERS

2.10.1 Fuses, Low Voltage Cartridge Type

NEMA FU 1.

2.10.2 Fuses, High-Interrupting-Capacity, Current-Limiting Type

Fuses, Class G, J, L and CC shall be in accordance with UL 198C.

2.10.3 Fuses, Class K, High-Interrupting-Capacity Type

UL 198D.

2.10.4 Fuses, Class H

UL 198B.

2.10.5 Fuses, Class R

UL 198E.

2.10.6 Fuses, Class T

UL 198H.

2.10.7 Fuses for Supplementary Overcurrent Protection

UL 198G.

2.10.8 Fuseholders

UL 512.

2.11 MOTORS, AC, FRACTIONAL AND INTEGRAL

Motors, ac, fractional and integral horsepower, 500 hp and smaller shall conform to NEMA MG 1 and UL 1004 for motors; NEMA MG 10 for energy management selection of polyphase motors. In addition to the standards listed above, motors shall be provided with efficiencies as specified in the table "MINIMUM NOMINAL EFFICIENCIES" below.

2.11.1 Rating

The horsepower rating of motors should be limited to no more than 125 percent of the maximum load being served unless a NEMA standard size does not fall within this range. In this case, the next larger NEMA standard motor size should be used.

2.11.2 Motor Efficiencies

All permanently wired polyphase motors of 1 hp or more shall meet the minimum full-load efficiencies as indicated in the following table, and as specified in this specification. Motors of 1 hp or more with open, drip proof or totally enclosed fan cooled enclosures shall be high efficiency type, unless otherwise indicated. Motor efficiencies indicated in the tables apply to general-purpose, single-speed, polyphase induction motors. Applications which require definite purpose, special purpose, special frame, or special mounted polyphase induction motors are excluded from these efficiency requirements. Motors provided as an integral part of motor driven equipment are excluded from this requirement if a minimum seasonal or overall efficiency requirement is indicated for that equipment by the provisions of another section.

MINIMUM NOMINAL MOTOR EFFICIENCIES
OPEN DRIP PROOF MOTORS

HP	1200 RPM	1800 RPM	3600 RPM
1	82.5	85.5	80.0
1.5	86.5	86.5	85.5
2	87.5	86.5	86.5
3	89.5	89.5	86.5
5	89.5	89.5	89.5
7.5	91.7	91.0	89.5
10	91.7	91.7	90.2
15	92.4	93.0	91.0
20	92.4	93.0	92.4
25	93.0	93.6	93.0

TOTALLY ENCLOSED FAN-COOLED MOTORS

HP	1200 RPM	1800 RPM	3600 RPM
1	82.5	85.5	78.5
1.5	87.5	86.5	85.5
2	88.5	86.5	86.5
3	89.5	89.5	88.5
5	89.5	89.5	89.5
7.5	91.7	91.7	91.0
10	91.7	91.7	91.7
15	92.4	92.4	91.7
20	92.4	93.0	92.4
25	93.0	93.6	93.0

2.12 MOTOR CONTROLS

2.12.1 General

NEMA ICS 1, NEMA ICS 2, NEMA ICS 3 and NEMA ICS 6, and UL 508 and UL 845. Panelboards supplying non-linear loads shall have neutrals sized for 200 percent of rated current.

2.12.2 Thermal-Overload Protection

Each motor of 1/8 hp or larger shall be provided with thermal-overload protection. Polyphase motors shall have overload protection in each ungrounded conductor. The overload-protection device shall be provided either integral with the motor or controller, or shall be mounted in a separate enclosure. Unless otherwise specified, the protective device shall be of the manually reset type. Single or double pole tumbler switches specifically designed for alternating-current operation only may be used as manual controllers for single-phase motors having a current rating not in excess of 80 percent of the switch rating.

2.12.3 Automatic Control Devices

2.12.3.1 Direct Control

Automatic control devices (such as thermostats, float or pressure switches) which control the starting and stopping of motors directly shall be designed for that purpose and have an adequate horsepower rating.

2.12.3.2 Pilot-Relay Control

Where the automatic-control device does not have such a rating, a magnetic starter shall be used, with the automatic-control device actuating the pilot-control circuit.

2.13 PANELBOARDS

Dead-front construction, NEMA PB 1 and UL 67.

2.14 RECEPTACLES

2.14.1 Heavy Duty Grade

NEMA WD 1. Devices shall conform to all requirements for heavy duty receptacles.

2.14.2 Standard Grade

UL 498.

2.14.3 Ground Fault Interrupters

UL 943, Class A or B.

2.14.4 NEMA Standard Receptacle Configurations

NEMA WD 6.

a. Single and Duplex, 20-Ampere, 125 Volt

20-ampere, non-locking: NEMA type 5-20R2.

b. 30-Ampere, 125/250 Volt

Three-pole, 3-wire, non-locking: NEMA type R32U.

c. 50-Ampere, 125/250 Volt

Three-pole, 4-wire grounding: NEMA type 14-50R.

2.15 SPLICE, CONDUCTOR

UL 486C.

2.16 SNAP SWITCHES

UL 20.

2.17 TAPES

2.17.1 Plastic Tape

UL 510.

2.17.2 Rubber Tape

UL 510.

2.18 WIRING DEVICES

NEMA WD 1 for wiring devices, and NEMA WD 6 for dimensional requirements of wiring devices.

PART 3 EXECUTION

3.1 GROUNDING

Grounding shall be in conformance with NFPA 70, the contract drawings, and the following specifications.

3.1.1 Grounding Conductors

A green equipment grounding conductor, sized in accordance with NFPA 70 shall be provided, regardless of the type of conduit. Equipment grounding bars shall be provided in all panelboards. The equipment grounding conductor shall be carried back to the service entrance grounding connection or separately derived grounding connection. All equipment grounding conductors, including metallic raceway systems used as such, shall be bonded or joined together in each wiring box or equipment enclosure. Metallic raceways and grounding conductors shall be checked to assure that they are wired or bonded into a common junction. Metallic boxes and enclosures, if used, shall also be bonded to these grounding conductors by an approved means per NFPA 70. When switches, or other utilization devices are installed, any designated grounding terminal on these devices shall also be bonded to the equipment grounding conductor junction with a short jumper.

3.2 WIRING METHODS

Wiring shall conform to NFPA 70, the contract drawings, and the following specifications. Unless otherwise indicated, wiring shall consist of insulated conductors installed in rigid zinc-coated steel conduit. Wire fill in conduits shall be based on NFPA 70 for the type of conduit and wire insulations specified.

3.2.1 Conduit and Tubing Systems

Conduit and tubing systems shall be installed as indicated. Conduit sizes shown are based on use of copper conductors with insulation types as described in paragraph WIRING METHODS. Minimum size of raceways shall be 1/2 inch. Only metal conduits will be permitted when conduits are required for shielding or other special purposes indicated, or when required by conformance to NFPA 70. Nonmetallic conduit and tubing may be used in damp, wet or corrosive locations when permitted by NFPA 70 and the conduit or tubing system is provided with appropriate boxes, covers, clamps, screws or other appropriate type of fittings. Electrical metallic tubing (EMT) may be

installed only within buildings. EMT may be installed in concrete and grout in dry locations. EMT installed in concrete or grout shall be provided with concrete tight fittings. EMT shall not be installed in damp or wet locations, or the air space of exterior masonry cavity walls. Bushings, manufactured fittings or boxes providing equivalent means of protection shall be installed on the ends of all conduits and shall be of the insulating type, where required by NFPA 70. Only UL listed adapters shall be used to connect EMT to rigid metal conduit, cast boxes, and conduit bodies. Aluminum conduit may be used only where installed exposed in dry locations. Except as otherwise specified, IMC may be used as an option for rigid steel conduit in areas as permitted by NFPA 70. Raceways shall not be installed under the firepits of boilers and furnaces and shall be kept 6 inches away from parallel runs of flues, steam pipes and hot-water pipes. Raceways shall be concealed within finished walls, ceilings, and floors unless otherwise shown. Raceways crossing structural expansion joints or seismic joints shall be provided with suitable expansion fittings or other suitable means to compensate for the building expansion and contraction and to provide for continuity of grounding.

3.2.1.1 Pull Wires

A pull wire shall be inserted in each empty raceway in which wiring is to be installed if the raceway is more than 50 feet in length and contains more than the equivalent of two 90-degree bends, or where the raceway is more than 150 feet in length. The pull wire shall be of No. 14 AWG zinc-coated steel, or of plastic having not less than 200 pounds per square inch tensile strength. Not less than 10 inches of slack shall be left at each end of the pull wire.

3.2.1.2 Conduit Stub-Ups

Where conduits are to be stubbed up through concrete floors, a short elbow shall be installed below grade to transition from the horizontal run of conduit to a vertical run. A conduit coupling fitting, threaded on the inside shall be installed, to allow terminating the conduit flush with the finished floor. Wiring shall be extended in rigid threaded conduit to equipment, except that where required, flexible conduit may be used 6 inches above the floor. Empty or spare conduit stub-ups shall be plugged flush with the finished floor with a threaded, recessed plug.

3.2.1.3 Below Slab-on-Grade or in the Ground

Electrical wiring below slab-on-grade shall be protected by a conduit system. Conduit passing vertically through slabs-on-grade shall be rigid steel or IMC. Rigid steel or IMC conduits installed below slab-on-grade or in the earth shall be field wrapped with 0.010 inch thick pipe-wrapping plastic tape applied with a 50 percent overlay, or shall have a factory-applied polyvinyl chloride, plastic resin, or epoxy coating system.

3.2.1.4 Changes in Direction of Runs

Changes in direction of runs shall be made with symmetrical bends or cast-metal fittings. Field-made bends and offsets shall be made with an approved hickey or conduit-bending machine. Crushed or deformed raceways shall not be installed. Trapped raceways in damp and wet locations shall be avoided where possible. Lodgment of plaster, dirt, or trash in raceways, boxes,

fittings and equipment shall be prevented during the course of construction. Clogged raceways shall be cleared of obstructions or shall be replaced.

3.2.1.5 Supports

Metallic conduits and tubing, and the support system to which they are attached, shall be securely and rigidly fastened in place to prevent vertical and horizontal movement at intervals of not more than 10 feet and within 3 feet of boxes, cabinets, and fittings, with approved pipe straps, wall brackets, conduit clamps, conduit hangers, threaded C-clamps, beam clamps, or ceiling trapeze. Loads and supports shall be coordinated with supporting structure to prevent damage or deformation to the structure. Loads shall not be applied to joist bridging. Attachment shall be by wood screws or screw-type nails to wood; by toggle bolts on hollow masonry units; by expansion bolts on concrete or brick; by machine screws, welded threaded studs, heat-treated or spring-steel-tension clamps on steel work. Nail-type nylon anchors or threaded studs driven in by a powder charge and provided with lock washers and nuts may be used in lieu of expansion bolts or machine screws. Raceways or pipe straps shall not be welded to steel structures. Cutting the main reinforcing bars in reinforced concrete beams or joists shall be avoided when drilling holes for support anchors. Holes drilled for support anchors, but not used, shall be filled. In partitions of light steel construction, sheet-metal screws may be used. Raceways shall not be supported using wire or nylon ties. Raceways shall be independently supported from the structure. Upper raceways shall not be used as a means of support for lower raceways. Supporting means shall not be shared between electrical raceways and mechanical piping or ducts. Cables and raceways shall not be supported by ceiling grids. Except where permitted by NFPA 70, wiring shall not be supported by ceiling support systems. Conduits shall be fastened to sheet-metal boxes and cabinets with two locknuts where required by NFPA 70, where insulating bushings are used, and where bushings cannot be brought into firm contact with the box; otherwise, a single locknut and bushing may be used. Threadless fittings for electrical metallic tubing shall be of a type approved for the conditions encountered. Additional support for horizontal runs is not required when EMT rests on steel stud cutouts.

3.2.1.6 Exposed Raceways

Exposed raceways shall be installed parallel or perpendicular to walls, structural members, or intersections of vertical planes and ceilings. Raceways under raised floors and above accessible ceilings shall be considered as exposed installations in accordance with NFPA 70 definitions.

3.2.1.7 Exposed Risers

Exposed risers in wire shafts of multistory buildings shall be supported by U-clamp hangers at each floor level, and at intervals not to exceed 10 feet.

3.2.1.8 Exposed Lengths of Conduit, Over 600 Volts

Exposed lengths of conduit containing power conductors operating at more than 600 volts shall have two red bands 2 inches wide spaced 8 inches apart painted near each coupling; the intervening space between the red bands shall be painted white, and on the white space the voltage shall be stenciled in black: 7620 volts.

3.2.1.9 Communications Raceways

Communications raceways indicated shall be installed in accordance with the previous requirements for conduit and tubing and with the additional requirement that no length of run shall exceed 50 feet for 1/2 inch and 3/4 inch sizes, and 100 feet for 1 inch or larger sizes, and shall not contain more than two 90-degree bends or the equivalent. Additional pull or junction boxes shall be installed to comply with these limitations whether or not indicated. Inside radii of bends in conduits of 1 inch size or larger shall not be less than ten times the nominal diameter.

3.2.2 Cables and Conductors

Installation shall conform to the requirements of NFPA 70. Covered, bare or insulated conductors of circuits rated over 600 volts shall not occupy the same equipment wiring enclosure, cable, or raceway with conductors of circuits rated 600 volts or less.

3.2.2.1 Sizing

Unless otherwise noted, all sizes are based on copper conductors and the insulation types indicated. Sizes shall be not less than indicated. Branch-circuit conductors shall be not smaller than No. 12 AWG. Conductors for branch circuits of 120 volts more than 100 feet long and of 277 volts more than 230 feet long, from panel to load center, shall be no smaller than No. 10 AWG. Class 1 remote control and signal circuit conductors shall be not less than No. 14 AWG. Class 2 remote control and signal circuit conductors shall be not less than No. 16 AWG. Class 3 low-energy, remote-control and signal circuits shall be not less than No. 22 AWG.

3.2.2.2 Use of Aluminum Conductors in Lieu of Copper

Aluminum conductors shall not be used.

3.2.2.3 Cable Systems

Cable systems shall be installed where indicated. Cables shall be installed concealed behind ceiling or wall finish where practicable. Cables shall be threaded through holes bored on the approximate centerline of wood members; notching of surfaces will not be permitted. Sleeves shall be provided through bond beams of masonry-block walls for threading cables through hollow spaces. Exposed cables shall be installed parallel or at right angles to walls or structural members. In rooms or areas not provided with ceiling or wall finish, cables and outlets shall be installed so that a room finish may be applied in the future without disturbing the cables or resetting the boxes. Exposed nonmetallic-sheathed cables less than 4 feet above floors shall be protected from mechanical injury by installation in conduit or tubing.

3.2.2.4 Cable Splicing

Splices shall be made in an accessible location. Crimping tools and dies shall be approved by the connector manufacturer for use with the type of connector and conductor.

a. Copper Conductors, 600 Volt and Under: Splices in conductors No. 10 AWG and smaller diameter shall be made with an insulated, pressure-type connector. Splices in conductors No. 8 AWG and larger diameter shall be made with a solderless connector and insulated with tape or heat-shrink type insulating material equivalent to the conductor insulation.

3.2.2.5 Conductor Identification and Tagging

Power, control, and signal circuit conductor identification shall be provided within each enclosure where a tap, splice, or termination is made. Where several feeders pass through a common pull box, the feeders shall be tagged to indicate clearly the electrical characteristics, circuit number, and panel designation. Phase conductors of low voltage power circuits shall be identified by color coding. Phase identification by a particular color shall be maintained continuously for the length of a circuit, including junctions.

a. Color coding shall be provided for service, feeder, branch, and ground conductors. Color shall be green for grounding conductors and white for neutrals; except where neutrals of more than one system are installed in the same raceway or box, other neutral shall be white with colored (not green) stripe. The color coding for 3-phase and single-phase low voltage systems shall be as follows:

   120/240-volt, 1-phase: Black and red.

b. Conductor phase and voltage identification shall be made by color-coded insulation for all conductors smaller than No. 6 AWG. For conductors No. 6 AWG and larger, identification shall be made by color-coded insulation, or conductors with black insulation may be furnished and identified by the use of half-lapped bands of colored electrical tape wrapped around the insulation for a minimum of 3 inches of length near the end, or other method as submitted by the Contractor and approved by the Contracting Officer.

c. Control and signal circuit conductor identification shall be made by color-coded insulated conductors, plastic-coated self-sticking printed markers, permanently attached stamped metal foil markers, or equivalent means as approved. Control circuit terminals of equipment shall be properly identified. Terminal and conductor identification shall match that shown on approved detail drawings. Hand lettering or marking is not acceptable.

3.3 BOXES AND SUPPORTS

Boxes shall be provided in the wiring or raceway systems where required by NFPA 70 for pulling of wires, making connections, and mounting of devices or fixtures. Pull boxes shall be furnished with screw-fastened covers. Indicated elevations are approximate, except where minimum mounting heights for hazardous areas are required by NFPA 70. Unless otherwise indicated, boxes for wall switches shall be mounted 48 inches above finished floors. Switch and outlet boxes located on opposite sides of fire rated walls shall be separated by a minimum horizontal distance of 24 inches. The total combined area of all box openings in fire rated walls shall not exceed 100 square inches per 100 square feet. Maximum box areas for individual boxes

in fire rated walls vary with the manufacturer and shall not exceed the maximum specified for that box in UL Elec Const Dir. Only boxes listed in UL Elec Const Dir shall be used in fire rated walls.

3.3.1 Box Applications

Each box shall have not less than the volume required by NFPA 70 for number of conductors enclosed in box. Boxes for metallic raceways shall be listed for the intended use when located in normally wet locations, when flush or surface mounted on outside of exterior surfaces, or when located in hazardous areas. Boxes installed in wet locations and boxes installed flush with the outside of exterior surfaces shall be gasketed. Boxes for mounting lighting fixtures shall be not less than 4 inches square, or octagonal, except smaller boxes may be installed as required by fixture configuration, as approved. Cast-metal boxes with 3/32 inch wall thickness are acceptable. Large size boxes shall be NEMA 3R or as shown. Boxes in other locations shall be sheet steel except that aluminum boxes may be used with aluminum conduit, and nonmetallic boxes may be used with nonmetallic conduit and tubing or nonmetallic sheathed cable system, when permitted by NFPA 70. Boxes for use in masonry-block or tile walls shall be square-cornered, tile-type, or standard boxes having square-cornered, tile-type covers.

3.3.2 Brackets and Fasteners

Boxes and supports shall be fastened to wood with wood screws or screw-type nails of equal holding strength, with bolts and metal expansion shields on concrete or brick, with toggle bolts on hollow masonry units, and with machine screw or welded studs on steel work. Threaded studs driven in by powder charge and provided with lockwashers and nuts, or nail-type nylon anchors may be used in lieu of expansion shields, or machine screws. Penetration of more than 1-1/2 inches into reinforced-concrete beams or more than 3/4 inch into reinforced-concrete joists shall avoid cutting any main reinforcing steel. The use of brackets which depend on gypsum wallboard or plasterboard for primary support will not be permitted. In partitions of light steel construction, bar hangers with 1 inch long studs, mounted between metal wall studs or metal box mounting brackets shall be used to secure boxes to the building structure. When metal box mounting brackets are used, additional box support shall be provided on the side of the box opposite the brackets. This additional box support shall consist of a minimum 12 inch long section of wall stud, bracketed to the opposite side of the box and secured by two screws through the wallboard on each side of the stud. Metal screws may be used in lieu of the metal box mounting brackets.

3.3.3 Mounting in Walls, Ceilings, or Recessed Locations

In walls or ceilings of concrete, tile, or other non-combustible material, boxes shall be installed so that the edge of the box is not recessed more than 1/4 inch from the finished surface. Boxes mounted in combustible walls or ceiling material shall be mounted flush with the finished surface. The use of gypsum or plasterboard as a means of supporting boxes will not be permitted. Boxes installed for concealed wiring shall be provided with suitable extension rings or plaster covers, as required. The bottom of boxes installed in masonry-block walls for concealed wiring shall be mounted flush with the top of a block to minimize cutting of the blocks, and boxes shall be located horizontally to avoid cutting webs of block. Separate boxes shall be provided for flush or recessed fixtures when required by the

fixture terminal operating temperature, and fixtures shall be readily removable for access to the boxes unless ceiling access panels are provided.

3.3.4 Installation in Overhead Spaces

In open overhead spaces, cast-metal boxes threaded to raceways need not be separately supported except where used for fixture support; cast-metal boxes having threadless connectors and sheet metal boxes shall be supported directly from the building structure or by bar hangers. Hangers shall not be fastened to or supported from joist bridging. Where bar hangers are used, the bar shall be attached to raceways on opposite sides of the box and the raceway shall be supported with an approved type fastener not more than 24 inches from the box.

3.4 DEVICE PLATES

One-piece type device plates shall be provided for all outlets and fittings. Plates on unfinished walls and on fittings shall be of zinc-coated sheet steel, cast-metal, or impact resistant plastic having rounded or beveled edges. Plates on finished walls shall be of steel with baked enamel finish or impact-resistant plastic and shall be ivory. Screws shall be of metal with countersunk heads, in a color to match the finish of the plate. Plates shall be installed with all four edges in continuous contact with finished wall surfaces without the use of mats or similar devices. Plaster fillings will not be permitted. Plates shall be installed with an alignment tolerance of 1/16 inch. The use of sectional-type device plates will not be permitted. Plates installed in wet locations shall be gasketed and provided with a hinged, gasketed cover, unless otherwise specified.

3.5 RECEPTACLES

3.5.1 Single and Duplex, 20-ampere, 125 volt

Single and duplex receptacles shall be rated 20 amperes, 125 volts, two-pole, three-wire, grounding type with polarized parallel slots. Bodies shall be of ivory to match color of switch handles in the same room or to harmonize with the color of the respective wall, and supported by mounting strap having plaster ears. Contact arrangement shall be such that contact is made on two sides of an inserted blade. Receptacle shall be side- or back-wired with two screws per terminal. The third grounding pole shall be connected to the metal mounting yoke. Switched receptacles shall be the same as other receptacles specified except that the ungrounded pole of each suitable receptacle shall be provided with a separate terminal. Only the top receptacle of a duplex receptacle shall be wired for switching application. Receptacles with ground fault circuit interrupters shall have the current rating as indicated, and shall be UL Class A type unless otherwise shown. Ground fault circuit protection shall be provided as required by NFPA 70 and as indicated on the drawings.

3.5.2 Weatherproof Applications

Weatherproof receptacles shall be suitable for the environment, damp or wet as applicable, and the housings shall be labeled to identify the allowable use. Receptacles shall be marked in accordance with UL 514A for the type of use indicated; "Damp locations", "Wet Locations", "Wet Location Only When Cover Closed". Assemblies shall be installed in accordance with the manufacturer's recommendations.

3.5.2.1 Damp Locations

Receptacles in damp locations shall be mounted in an outlet box with a gasketed, weatherproof, cast-metal cover plate (device plate, box cover) and a gasketed cap (hood, receptacle cover) over each receptacle opening. The cap shall be either a screw-on type permanently attached to the cover plate by a short length of bead chain or shall be a flap type attached to the cover with a spring loaded hinge.

3.5.2.2 Wet Locations

Receptacles in wet locations shall be installed in an assembly rated for such use whether the plug is inserted or withdrawn, unless otherwise indicated. In a duplex installation, the receptacle cover shall be configured to shield the connections whether one or both receptacles are in use.

3.5.3 Receptacles, 20-Ampere, 250-Volt

Receptacles, single, 20-ampere, 250-volt, shall be ivory molded plastic, two-pole, three-wire or three-pole, four-wire, grounding type complete with appropriate mating cord-grip plug.

3.5.4 Receptacles, 30-Ampere, 125/250-Volt

Receptacles, single, 30-ampere, 125/250-volt, shall be molded-plastic, three-pole, four-wire, grounding type, complete with appropriate mating cord-grip type attachment plug. Each dryer receptacle shall be furnished with a non-detachable power supply cord for connection to the electric clothes dryer. The cord shall be an angle-type 36 inch length of Type SRD range and dryer cable with three No. 10 AWG conductors.

3.5.5 Receptacles, 50-Ampere, 125/250-Volt

Receptacles, single 50-ampere, 125/250-volt, shall be flush, molded plastic, three-pole, four-wire, grounding type. Each range receptacle shall be furnished with a nondetachable power supply cord for connection to the electric range. The cord shall be an angle-type 36 inch length of SRD range and dryer cable with one No. 8 and two No. 6 AWG conductors.

3.6 WALL SWITCHES

Wall switches shall be of the totally enclosed tumbler type. The wall switch handle and switch plate color shall be ivory. Wiring terminals shall be of the screw type or of the solderless pressure type having suitable conductor-release arrangement. Not more than one switch shall be installed in a single-gang position. Switches shall be rated 20-ampere 120-volt for use on alternating current only. Pilot lights indicated shall consist of yoke-mounted candelabra-base sockets rated at 75 watts, 125 volts, and fitted with glass or plastic jewels. A clear 6-watt lamp shall be furnished and installed in each pilot switch. Jewels for use with switches controlling motors shall be green, and jewels for other purposes shall be red. Dimming switches shall be solid-state flush mounted, sized for the loads.

3.7 SERVICE EQUIPMENT

Service-disconnecting means shall be of the type indicated in paragraph PANELBOARDS with an external handle for manual operation. When service disconnecting means is a part of an assembly, the assembly shall be listed as suitable for service entrance equipment. Enclosures shall be sheet metal with hinged cover for surface mounting unless otherwise indicated.

3.8 PANELBOARDS AND LOADCENTERS

Circuit breakers and switches used as a motor disconnecting means shall be capable of being locked in the open position. Door locks shall be keyed alike. Nameplates shall be as approved. Directories shall be typed to indicate loads served by each circuit and mounted in a holder behind a clear protective covering. Busses shall be copper.

3.8.1 Panelboards

Panelboards shall be circuit breaker equipped as indicated on the drawings.

3.9 FUSES

Equipment provided under this contract shall be provided with a complete set of properly rated fuses when the equipment manufacturer utilize fuses in the manufacture of the equipment, or if current-limiting fuses are required to be installed to limit the ampere-interrupting capacity of circuit breakers or equipment to less than the maximum available fault current at the location of the equipment to be installed. Fuses shall have a voltage rating of not less than the phase-to-phase circuit voltage, and shall have the time-current characteristics required for effective power system coordination.

3.9.1 Cartridge Fuses; Noncurrent-Limiting Type

Cartridge fuses of the noncurrent-limiting type shall be Class H, nonrenewable, dual element, time lag type and shall have interrupting capacity of 10,000 amperes. At 500 percent current, cartridge fuses shall not blow in less than 10 seconds.

3.9.2 Cartridge Fuses; Current-Limiting Type

Cartridge fuses, current-limiting type, Class RK1 shall have tested interrupting capacity not less than 200,000 amperes. Fuse holders shall be the type that will reject all Class H fuses.

3.9.3 Continuous Current Ratings (600 Amperes and Smaller)

Service entrance and feeder circuit fuses (600 amperes and smaller) shall be Class RK1, current-limiting, time-delay with 200,000 amperes interrupting capacity.

3.9.4 Motor and Transformer Circuit Fuses

Motor, motor controller, transformer, and inductive circuit fuses shall be Class RK1 or RK5, current-limiting, time-delay with 200,000 amperes interrupting capacity.

3.10 MOTORS

Each motor shall conform to the hp and voltage ratings indicated, and shall have a service factor and other characteristics that are essential to the proper application and performance of the motors under conditions shown or specified. Unless otherwise specified, all motors shall have open frames, and continuous-duty classification based on a 40 degree C ambient temperature reference. Polyphase motors shall be squirrel-cage type, having normal-starting-torque and low-starting-current characteristics, unless other characteristics are specified in other sections of these specifications or shown on contract drawings. The Contractor shall be responsible for selecting the actual horsepower ratings and other motor requirements necessary for the applications indicated. When electrically driven equipment furnished under other sections of these specifications materially differs from the design, the Contractor shall make the necessary adjustments to the wiring, disconnect devices and branch-circuit protection to accommodate the equipment actually installed.

3.11 MOTOR CONTROL

Each motor or group of motors requiring a single control and not controlled from a motor-control center shall be provided under other sections of these specifications with a suitable controller and devices that will perform the functions as specified for the respective motors. Each motor of 1/8 hp or larger shall be provided with thermal-overload protection. Polyphase motors shall have overload protection in each ungrounded conductor. The overload-protection device shall be provided either integral with the motor or controller, or shall be mounted in a separate enclosure. Unless otherwise specified, the protective device shall be of the manually reset type. Single or double pole tumbler switches specifically designed for alternating-current operation only may be used as manual controllers for single-phase motors having a current rating not in excess of 80 percent of the switch rating. Automatic control devices such as thermostats, float or pressure switches may control the starting and stopping of motors directly, provided the devices used are designed for that purpose and have an adequate horsepower rating. When the automatic-control device does not have such a rating, a magnetic starter shall be used, with the automatic-control device actuating the pilot-control circuit. When combination manual and automatic control is specified and the automatic-control device operates the motor directly, a double-throw, three-position tumbler or rotary switch shall be provided for the manual control; when the automatic-control device actuates the pilot control circuit of a magnetic starter, the latter shall be provided with a three-position selector switch marked MANUAL-OFF-AUTOMATIC. Connections to the selector switch shall be such that only the normal automatic regulatory control devices will be bypassed when the switch is in the Manual position; all safety control devices, such as low- or high-pressure cutouts, high-temperature cutouts, and motor-overload protective devices, shall be connected in the motor-control circuit in both the Manual and the Automatic positions of the selector switch. Control circuit connections to any MANUAL-OFF-AUTOMATIC switch or to more than one automatic regulatory control device shall be made in accordance with wiring diagram approved by the Contracting Officer unless such diagram is included on the drawings. All controls shall be 120 volts or less unless otherwise indicated.

3.11.1 Contacts

Unless otherwise indicated, contacts in miscellaneous control devices such as float switches, pressure switches, and auxiliary relays shall have current and voltage ratings in accordance with NEMA ICS 2 for rating designation B300.

3.11.2 Safety Controls

Safety controls for boilers shall be connected to a 2-wire, 120 volt grounded circuit supplied from the associated boiler-equipment circuit. Where the boiler circuit is more than 120 volts to ground, safety controls shall be energized through a two-winding transformer having its 120 volt secondary winding grounded. Overcurrent protection shall be provided in the ungrounded secondary conductor and shall be sized for the load encountered.

3.12 MOTOR-DISCONNECT MEANS

Each motor shall be provided with a disconnecting means when required by NFPA 70 even though not indicated. For single-phase motors, a single or double pole toggle switch, rated only for alternating current, will be acceptable for capacities less than 30 amperes, provided the ampere rating of the switch is at least 125 percent of the motor rating. Switches shall disconnect all ungrounded conductors.

3.13 LIGHTING FIXTURES, LAMPS AND BALLASTS

This paragraph shall cover the installation of lamps, lighting fixtures and ballasts in interior or building mounted applications.

3.13.1 Lamps

Lamps of the type, wattage, and voltage rating indicated shall be delivered to the project in the original cartons and installed just prior to project completion. Lamps installed and used for working light during construction shall be replaced prior to turnover to the Government if more than 15% of their rated life has been used. Lamps shall be tested for proper operation prior to turn-over and shall be replaced if necessary with new lamps from the original manufacturer. 10% spare lamps of each type, from the original manufacturer, shall be provided.

3.13.2 Lighting Fixtures

Fixtures shall be as shown and shall conform to the following specifications and shall be as detailed on the drawings. Illustrations shown on the drawings are indicative of the general type desired and are not intended to restrict selection to fixtures of any particular manufacturer. Fixtures of similar designs and equivalent energy efficiency, light distribution and brightness characteristics, and of equal finish and quality will be acceptable if approved. In suspended acoustical ceilings with fluorescent fixtures, the fluorescent emergency light fixtures shall be furnished with self-contained battery packs.

3.13.2.1 Accessories

Accessories such as straps, mounting plates, nipples, or brackets shall be provided for proper installation.

3.13.2.2 Ceiling Fixtures

Ceiling fixtures shall be coordinated with and suitable for installation in, on or from the ceiling as shown. Installation and support of fixtures shall be in accordance with NFPA 70 and manufacturer's recommendations. Where seismic requirements are specified herein, fixtures shall be supported as shown or specified. Recessed fixtures shall have adjustable fittings to permit alignment with ceiling panels. Recessed fixtures installed in fire-resistive ceiling construction shall have the same fire rating as the ceiling or shall be provided with fireproofing boxes having materials of the same fire rating as the ceiling, in conformance with UL Elec Const Dir. Surface-mounted fixtures shall be suitable for fastening to the ceiling panel structural supports.

3.13.2.3 Fixtures for Installation in Grid Type Ceilings

Fixtures for installation in grid type ceilings which are smaller than a full tile shall be centered in the tile. 1 by 4 foot fixtures shall be mounted along the grid rail as shown. Work above the ceiling shall be coordinated among the trades to provide the lighting layout shown. Fixtures mounted to the grid shall have trim exactly compatible with the grid. Contractor shall coordinate trims with ceiling trades prior to ordering fixtures. Metric fixtures shall be designed to fit the metric grid specified. Fixtures in continuous rows shall be coordinated between trades prior to ordering. Fixtures shall be mounted using independent supports capable of supporting the entire weight of the fixture. No fixture shall rest solely on the ceiling grid. Recessed fixtures installed in seismic areas should be installed utilizing specially designed seismic clips. Junction boxes shall be supported at four points.

3.13.2.4 Suspended Fixtures

Suspended fixtures shall be provided with swivel hangers or hand-straights so that they hang plumb. Pendants, rods, or chains 4 feet or longer excluding fixture shall be braced to prevent swaying using three cables at 120 degrees of separation. Suspended fixtures in continuous rows shall have internal wireway systems for end to end wiring and shall be properly aligned to provide a straight and continuous row without bends, gaps, light leaks or filler pieces. Aligning splines shall be used on extruded aluminum fixtures to assure hairline joints. Steel fixtures shall be supported to prevent "oil-canning" effects. Fixture finishes shall be free of scratches, nicks, dents, and warps, and shall match the color and gloss specified. Pendants shall be finished to match fixtures. Aircraft cable shall be stainless steel. Canopies shall be finished to match the ceiling and shall be low profile unless otherwise shown. Maximum distance between suspension points shall be 10 feet or as recommended by the manufacturer, whichever is less.

Suspended fixtures installed in seismic areas shall have 45% swivel hangers and shall be located with no obstructions within the 45% range in all directions. The stem, canopy and fixture shall be capable of 45% swing.

3.13.3 Ballasts

Remote type ballasts or transformers, where indicated, shall be mounted in a well ventilated, easily accessible location, within the maximum operating distance from the lamp as designated by the manufacturer.

3.13.4 Emergency Light Sets

Emergency light sets shall conform to UL 924 with the number of heads as indicated. Sets shall be permanently connected to the wiring system by conductors installed in short lengths of flexible conduit.

3.14 EQUIPMENT CONNECTIONS

Wiring not furnished and installed under other sections of the specifications for the connection of electrical equipment as indicated on the drawings shall be furnished and installed under this section of the specifications. Connections shall comply with the applicable requirements of paragraph WIRING METHODS. Flexible conduits 6 feet or less in length shall be provided to all electrical equipment subject to periodic removal, vibration, or movement and for all motors. All motors shall be provided with separate grounding conductors. Liquid-tight conduits shall be used in damp or wet locations.

3.14.1 Motors and Motor Control

Motors, motor controls, and motor control centers shall be installed in accordance with NFPA 70, the manufacturer's recommendations, and as indicated. Wiring shall be extended to motors, motor controls, and motor control centers and terminated.

3.14.2 Installation of Government-Furnished Equipment

Wiring shall be extended to the equipment and terminated.

3.15 CIRCUIT PROTECTIVE DEVICES

The Contractor shall calibrate, adjust, set and test each new adjustable circuit protective device to ensure that they will function properly prior to the initial energization of the new power system under actual operating conditions.

3.16 PAINTING AND FINISHING

Field-applied paint on exposed surfaces shall be provided under Section 09900 PAINTING, GENERAL.

3.17 REPAIR OF EXISTING WORK

The work shall be carefully laid out in advance, and where cutting, channeling, chasing, or drilling of floors, walls, partitions, ceiling, or other surfaces is necessary for the proper installation, support, or anchorage of the conduit, raceways, or other electrical work, this work shall be carefully done, and any damage to building, piping, or equipment shall be repaired by skilled mechanics of the trades involved at no additional cost to the Government.

3.18 FIELD TESTING

Field testing shall be performed in the presence of the Contracting Officer. The Contractor shall notify the Contracting Officer 10 days prior to conducting tests. The Contractor shall furnish all materials, labor, and

equipment necessary to conduct field tests. The Contractor shall perform all tests and inspection recommended by the manufacturer unless specifically waived by the Contracting Officer. The Contractor shall maintain a written record of all tests which includes date, test performed, personnel involved, devices tested, serial number and name of test equipment, and test results. All field test reports will be signed and dated by the Contractor.

3.18.1 Safety

The Contractor shall provide and use safety devices such as rubber gloves, protective barriers, and danger signs to protect and warn personnel in the test vicinity. The Contractor shall replace any devices or equipment which are damaged due to improper test procedures or handling.

3.18.2 Cable Tests

The Contractor shall be responsible for identifying all equipment and devices that could be damaged by application of the test voltage and ensuring that they have been properly disconnected prior to performing insulation resistance testing. An insulation resistance test shall be performed on all low and medium voltage cables after the cables are installed in their final configuration and prior to energization. The test voltage shall be 500 volts DC applied for one minute between each conductor and ground and between all possible combinations of conductors. The minimum value of resistance shall be:

R in megohms = (rated voltage in kV + 1) x 1000/(length of cable in feet)

Each cable failing this test shall be repaired or replaced. The repaired cable system shall then be retested until failures have been eliminated.

3.18.2.1 Low Voltage Cable Tests

a. Continuity test.

b. Insulation resistance test.

3.18.3 Motor Tests

a. Phase rotation test to ensure proper directions.

b. Operation and sequence of reduced voltage starters.

c. High potential test on each winding to ground.

d. Insulation resistance of each winding to ground.

e. Vibration test.

f. Dielectric absorption test on motor.

3.18.4 Circuit Breaker Tests

The following field tests shall be performed on circuit breakers.

3.18.4.1 Circuit Breakers, Molded Case

a. Insulation resistance test phase-to-phase, all combinations.

b. Insulation resistance test phase-to-ground, each phase.

c. Closed breaker contact resistance test.

d. Manual operation of the breaker.

3.19 OPERATING TESTS

After the installation is completed, and at such time as the Contracting Officer may direct, the Contractor shall conduct operating tests for approval. The equipment shall be demonstrated to operate in accordance with the specified requirements. An operating test report shall be submitted in accordance with paragraph FIELD TESTING.

3.20 ACCEPTANCE

Final acceptance of the facility will not be given until the Contractor has successfully completed all tests and after all defects in installation, material or operation have been corrected.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK